



MILESTAR[®]
TIRES

2026 PRODUCT CATALOG



MILESTAR[®] TIRES

MILESTAR TIRES are engineered for exceptional quality, performance, and value. Our extensive lineup includes Passenger, High Performance, Ultra-High Performance, Light Truck, Commercial Medium Radial Truck, and Specialty Tire applications—delivering solutions for drivers who demand reliability and innovation.

Owned and marketed by Tireco, Inc., a U.S.-based private brand marketer and distribution company. Founded in 1972, Tireco, Inc. has grown into an industry leader in consumer, commercial, and specialty tires, as well as towable and custom wheel products.



TIRE LINEUP

PASSENGER CAR	2
MS932 SPORT	4
WEATHERGUARD AS710 SPORT	6
WEATHERGUARD AW365	8
INTERCEPTOR AS810	10
WINTERGUARD	12
STREETSTEEL	14
MS775 TOURING SLE	16
LIGHT TRUCK / SUV	18
PATAGONIA M/T-02	20
PATAGONIA X/T	22
PATAGONIA A/T PRO	24
PATAGONIA A/T R	26
PATAGONIA H/T	28
COMMERCIAL LT / VAN	30
STEELPRO MS597	32
STEELPRO MS597S	34
STEELPRO AST	36
STANDARD LIMITED WARRANTY	38
STANDARD LIMITED MILEAGE WARRANTY	40
30-DAY RIDE GUARANTEE PROGRAM	42
ROAD HAZARD PROGRAM	43
SIZE MATRIX • PASSENGER CAR	44
PATAGONIA SIZE MATRIX • SUV / LIGHT TRUCK	45

PASSENGER CAR TIRE PRODUCT LINEUP

SHOWN: NISSAN® 370Z - INTERCEPTOR AS810 - FRONT: 225/45ZR18 - REAR: 245/40ZR18



MS932 SPORT

PERFORMANCE
TOURING

WEATHERGUARD AS710 SPORT

ALL-SEASON
PERFORMANCE

WEATHERGUARD AW365

ALL-WEATHER
PERFORMANCE

INTERCEPTOR AS810

ULTRA-HIGH PERFORMANCE
ALL-SEASON

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



ALL-NEW /

WINTERGUARD

STUDDABLE

STREETSTEEL

CLASSIC
PERFORMANCE

**MS775
TOURING SLE**

ALL-SEASON
TOURING

MS932 SPORT

• PERFORMANCE TOURING • PASSENGER / SUV



The **MS932 SPORT**, designed to maximize performance, features the latest in optimized tread design for excellent all-season traction and handling while providing a quiet and comfortable ride. Ideal for modern sedans, sport sedans, SUVs, and sport coupes, and utilizes an advanced tread compound for great wet weather handling and improved treadwear. The MS932 SPORT is sure to cover your high performance needs, and is backed by a 50K Mile Limited Warranty for W-speed ratings, and 60K miles for T, H, and V-speed ratings.



SHOWN: BMW® 3 SERIES - MS932 SPORT - 225/45R18



- WIDE CIRCUMFERENTIAL RIBS**
Improves stability, handling, and lateral grip.
- OPTIMIZED TREAD PATTERN**
Provides consistent grip all year round.
- WIDE CIRCUMFERENTIAL GROOVES**
Aids in the evacuation of water to reduce hydroplaning.
- LATERAL SIPING**
Consistent traction in inclement weather.

PERFORMANCE RATINGS[†]



Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width [Measured]	Rim Width [Approved]	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
14"	175/65R14	24510031	82T	BW	SL	10/32	5.00	5.00 - 6.00	7.0	23.0	1047@44	16.1	540 A B
	185/65R14	24515041	86H	BW	SL	10/32	5.50	5.00 - 6.50	7.4	23.5	1188@44	17.9	540 A B
15"	185/65R15	24525031	88H	BW	SL	10/32	5.50	5.00 - 6.50	7.4	24.4	1235@44	19.2	540 A A
	195/60R15	24635030	88H	BW	SL	10/32	6.00	5.50 - 7.00	7.9	24.2	1235@44	19.4	540 A A
	195/65R15	24530036	91H	BW	SL	10/32	6.00	5.50 - 7.00	7.9	25.0	1356@44	20.3	540 A A
	205/65R15	24000038	94V	BW	SL	10/32	6.00	5.50 - 7.50	8.2	25.5	1477@44	21.8	540 A A
16"	205/55R16	24460021	91V	BW	SL	10/32	6.50	5.50 - 7.50	8.4	24.9	1356@44	21.2	540 A A
	205/60R16	24653030	92V	BW	SL	10/32	6.00	5.50 - 7.50	8.2	25.7	1389@44	21.7	540 A A
	205/65R16	24555008	95H	BW	SL	10/32	6.00	5.50 - 7.50	8.2	25.5	1521@44	24.0	540 A A
	215/55R16	24000039	97V	BW	XL	10/32	7.00	6.00 - 7.50	8.9	25.3	1609@50	23.3	540 A A
	215/60R16	24656038	95V	BW	SL	10/32	6.50	6.00 - 7.50	8.7	26.1	1521@44	24.3	540 A A
	215/65R16	24560028	102H	BW	XL	10/32	6.50	6.00 - 7.50	8.7	27.0	1874@50	25.4	540 A A
	225/60R16	24665024	99H	BW	SL	10/32	6.50	6.00 - 8.00	9.0	26.6	1653@44	25.6	540 A A
	225/65R16	24666006	100H	BW	SL	10/32	6.50	6.00 - 8.00	9.0	27.5	1764@44	26.9	540 A A
	235/60R16	24678019	100H	BW	SL	10/32	7.00	6.50 - 8.50	9.4	27.1	1764@44	27.8	540 A A
	205/50R17	24386006	93V	BW	XL	10/32	6.50	5.50 - 7.50	8.4	25.1	1433@50	21.8	540 A A
17"	215/45R17	24975026	91W	BW	XL	10/32	7.00	7.00 - 8.00	8.4	24.6	1356@50	21.5	540 A A
	215/50R17	24000030	95W	BW	XL	10/32	7.00	6.00 - 7.50	8.9	25.5	1521@50	22.9	540 A A
	215/55R17	24470009	98V	BW	XL	10/32	7.00	6.00 - 7.50	8.9	26.3	1653@50	25.6	540 A A
	215/60R17	24567011	100H	BW	XL	10/32	6.50	6.00 - 7.50	8.7	27.2	1764@50	25.6	540 A A
	215/65R17	24656999	99V	BW	SL	10/32	6.50	6.00 - 7.50	8.7	28.0	1709@44	26.3	540 A A
	225/45R17	24977040	94W	BW	XL	10/32	7.50	7.00 - 8.50	8.9	25.0	1477@50	22.5	540 A A
	225/50R17	24395008	98V	BW	XL	10/32	7.00	6.00 - 8.00	9.2	25.9	1653@50	26.3	540 A A
	225/55R17	24475009	101V	BW	XL	10/32	7.00	6.00 - 8.00	9.2	26.8	1819@50	27.1	540 A A
	225/60R17	24652502	99V	BW	SL	10/32	6.50	6.00 - 8.00	9.0	27.6	1709@44	26.7	540 A A
	225/65R17	24657001	102V	BW	SL	10/32	6.50	6.00 - 8.00	9.0	28.5	1874@44	28.0	540 A A
	235/45R17	24980027	97W	BW	XL	10/32	8.00	7.00 - 9.00	9.3	25.4	1609@50	23.9	540 A A
	235/50R17	24400005	96V	BW	SL	10/32	7.50	6.50 - 8.50	9.6	26.3	1585@44	27.1	540 A A
	235/55R17	24480017	99W	BW	SL	10/32	7.50	6.50 - 8.50	9.6	27.2	1709@44	27.7	540 A A
	235/60R17	24652503	102V	BW	SL	10/32	7.00	6.50 - 8.50	9.4	28.1	1874@44	28.5	540 A A
	235/65R17	24657002	108V	BW	XL	10/32	7.00	6.50 - 8.50	9.4	29.1	2205@50	29.1	540 A A
	245/45R17	24982010	99V	BW	XL	10/32	8.00	7.50 - 9.00	9.6	25.7	1709@50	25.3	540 A A
	245/55R17	24652501	105V	BW	SL	10/32	7.00	7.00 - 8.50	9.8	29.5	2039@44	30.4	540 A A
	18"	215/55R18	24495003	99V	BW	XL	10/32	7.00	6.00 - 7.50	8.9	27.3	1709@50	26.0
225/40R18		24077031	92W	BW	XL	10/32	8.00	7.50 - 9.00	9.1	25.1	1389@50	22.8	540 A A
225/45R18		24990015	95W	BW	XL	10/32	7.50	7.00 - 8.50	8.9	25.9	1521@50	24.1	540 A A
225/50R18		24658008	95W	BW	SL	10/32	7.00	6.00 - 8.00	9.2	26.9	1521@44	27.1	540 A A
225/55R18		24659003	98V	BW	SL	10/32	7.00	6.00 - 8.00	9.2	27.8	1653@44	27.1	540 A A
225/60R18		24000040	104V	BW	XL	10/32	6.50	6.00 - 8.00	9.0	28.6	1984@50	28.9	540 A A
235/40R18		24080028	95W	BW	XL	10/32	8.50	8.00 - 9.50	9.5	25.4	1521@50	24.3	540 A A
235/45R18		24998013	94W	BW	SL	10/32	8.00	7.50 - 9.00	9.3	26.3	1477@44	25.3	540 A A
235/50R18		24410010	101W	BW	XL	10/32	7.50	6.50 - 8.50	9.6	27.3	1819@50	28.0	540 A A
235/55R18		24496709	104V	BW	XL	10/32	7.50	6.50 - 8.50	9.6	28.1	1984@50	30.3	540 A A
235/60R18		24583201	107V	BW	XL	10/32	7.00	6.50 - 8.50	9.4	29.1	2150@50	29.6	540 A A
235/65R18		24000033	106V	BW	SL	10/32	7.00	6.50 - 8.50	9.4	30.0	2094@44	30.0	540 A A
245/40R18		24082024	97W	BW	XL	10/32	8.50	8.00 - 9.50	9.8	25.7	1609@50	26.2	540 A A
245/45R18		24995019	100W	BW	XL	10/32	8.00	7.50 - 9.00	9.6	26.7	1764@50	27.8	540 A A
245/50R18		24375007	104W	BW	XL	10/32	7.50	7.00 - 8.50	10.0	27.7	1984@50	30.1	540 A A
245/55R18		24375000	103V	BW	SL	10/32	7.50	7.00 - 8.50	10.0	28.6	1929@44	32.1	540 A A
245/60R18		24376001	105H	BW	SL	10/32	7.00	7.00 - 8.50	9.8	29.6	2039@44	30.3	540 A A
255/55R18		24995010	109V	BW	XL	10/32	8.00	7.00 - 9.00	10.4	29.0	2271@50	32.4	540 A A
255/60R18		24609002	112V	BW	XL	10/32	7.50	7.00 - 9.00	10.2	30.0	2469@50	32.3	540 A A
255/65R18		24627005	111H	BW	SL	10/32	7.50	7.00 - 9.00	10.2	31.1	2403@44	35.2	540 A A
265/60R18	24583301	110V	BW	SL	10/32	8.00	7.50 - 9.50	10.7	30.5	2337@44	34.5	540 A A	
19"	225/55R19	24000031	103V	BW	XL	10/32	7.00	6.00 - 8.00	9.2	28.8	1929@50	29.6	540 A A
	235/40R19	24651006	96W	BW	XL	10/32	8.50	8.00 - 9.50	9.5	26.4	1585@50	25.9	540 A A
	235/45R19	24880803	99W	BW	XL	10/32	8.00	7.50 - 9.00	9.3	27.4	1709@50	27.2	540 A A
	235/50R19	24880503	103V	BW	XL	10/32	7.50	6.50 - 8.50	9.6	28.3	1929@50	29.7	540 A A
	235/55R19	24497002	105V	BW	XL	10/32	7.50	6.50 - 8.50	9.6	29.2	2039@50	31.4	540 A A
	245/40R19	24083108	98W	BW	XL	10/32	8.50	8.00 - 9.50	9.8	26.7	1653@50	27.3	540 A A
	245/45R19	24996011	102W	BW	XL	10/32	8.00	7.50 - 9.00	9.6	27.7	1874@50	28.8	540 A A
	245/55R19	24377001	103V	BW	SL	10/32	7.50	7.00 - 8.50	10.0	29.6	1929@44	35.0	540 A A
	255/40R19	24849005	100W	BW	XL	10/32	9.00	8.50 - 10.00	10.2	27.0	1764@50	28.9	540 A A
	255/45R19	24985500	100V	BW	SL	10/32	8.50	8.00 - 9.50	10.0	28.1	1764@44	31.0	540 A A
	255/50R19	24083011	107V	BW	XL	10/32	8.00	7.00 - 9.00	10.4	29.1	2150@50	33.0	540 A A
	255/55R19	24602104	107V	BW	SL	10/32	8.00	7.00 - 9.00	10.4	30.0	2149@44	34.7	540 A A
	255/60R19	24628004	113H	BW	XL	10/32	7.50	7.00 - 9.00	10.2	31.1	2535@50	34.1	540 A A
	20"	235/55R20	24498001	105V	BW	XL	10/32	7.50	6.50 - 8.50	9.6	30.2	2039@50	32.6
245/40R20		24085007	99W	BW	XL	10/32	8.50	8.00 - 9.50	9.8	27.7	1709@50	28.4	540 A A
245/45R20		24087010	103W	BW	XL	10/32	8.00	7.50 - 9.00	9.6	28.7	1929@50	30.0	540 A A
245/50R20		24374007	105V	BW	XL	10/32	7.50	7.00 - 8.50	10.0	29.7	2039@50	33.2	540 A A
255/35R20		24065013	97W	BW	XL	10/32	9.00	8.50 - 10.00	10.2	27.0	1609@50	27.1	540 A A
255/45R20		24984010	105W	BW	XL	10/32	8.50	8.00 - 9.50	10.0	29.1	2039@50	31.5	540 A A
255/50R20		24602002	109V	BW	XL	10/32	8.00	7.00 - 9.00	10.4	30.1	2271@50	36.2	540 A A
255/55R20		24603201	110V	BW	XL	10/32	8.00	7.00 - 9.00	10.4	31.0	2337@50	36.8	540 A A
265/50R20	24652010	111V	BW	XL	10/32	8.50	7.50 - 9.50	10.9	30.5	2403@50	36.8	540 A A	

* 60K Mile Limited Warranty on T, H, and V-speed ratings / 50K Mile Limited Warranty on W-speed ratings.

† Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



ALL-SEASON

Pattern design and tread compound enhanced for seasonal conditions.



DRY TRACTION

Performance-enhanced tread design for improved handling in dry conditions.



FITMENTS

Designed for a variety of today's vehicles, including touring and CUV applications.



WEATHERGUARD AS710 SPORT

• ALL-SEASON PERFORMANCE • PASSENGER / SUV



The **WEATHERGUARD AS710 SPORT** redefines all-season performance without sacrificing comfort and noise levels, letting you stay on-the-road all-year long. Featuring a **MILETECH®** advanced silica-enriched compound, this tire delivers improved handling, along with enhanced durability in both wet and dry conditions. Optimal tread blocks, variable depth siping, and lateral grooves all allow this tire to perform year-round, with enhanced braking and handling in inclement weather. The AS710 SPORT all-season tire will consistently get you through each season at an amazing value, and is backed by a 70K Mile Limited Warranty for H, V, and W-speed ratings, and 80K miles for T-speed ratings. The ideal tire for coupes, sedans, and SUVs, the AS710 SPORT comes in a variety of sizes ranging from 15 to 20 inches, with T, H, V, and W-speed ratings.



SHOWN: BMW® 3 SERIES · WEATHERGUARD AS710 SPORT · 235/50R18



- 
WIDE CIRCUMFERENTIAL GROOVES
 Aids in the evacuation of water to reduce hydroplaning.
- 
LOW ROLLING RESISTANCE
 Uses less energy to roll the tire and delivers better fuel economy.
- 
WIDE CIRCUMFERENTIAL RIBS
 Improves stability, handling, and lateral grip.
- 
VARIABLE SIPING
 Provides consistent traction throughout the life of the tire.

PERFORMANCE RATINGS[†]



Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
16"	205/55R16	24460052	94V	BW	XL	11/32	6.50	5.50 - 7.50	8.3	25.0	1477@51	21.3	720 A A
	205/60R16	24653033	96V	BW	XL	11/32	6.00	5.50 - 7.50	8.3	25.7	1565@51	22.1	720 A A
	205/65R16	24555013	99H	BW	XL	11/32	6.00	5.50 - 7.50	8.4	26.3	1709@51	24.4	720 A A
	215/55R16	24556030	97V	BW	XL	11/32	7.00	6.00 - 7.50	8.9	25.4	1609@51	22.9	720 A A
	215/60R16	24655037	99V	BW	XL	11/32	6.50	6.00 - 7.50	8.9	26.3	1709@51	24.4	720 A A
	215/65R16	24560029	102H	BW	XL	11/32	6.50	6.00 - 7.50	8.9	27.2	1874@51	25.9	720 A A
	215/70R16	24156013	100T	BW	SL	11/32	6.50	5.50 - 7.00	8.8	27.9	1764@51	27.5	720 A A
	225/60R16	24665040	102V	BW	XL	11/32	6.50	6.00 - 8.00	9.0	26.7	1874@51	26.2	720 A A
	235/70R16	24265022	109T	BW	XL	11/32	7.00	6.00 - 8.00	9.4	29.0	2271@51	30.7	720 A A
	205/50R17	24385106	93V	BW	XL	11/32	6.50	5.50 - 7.50	8.2	25.3	1433@51	21.6	580 A A
17"	215/45R17	24975029	91W	BW	XL	11/32	7.00	7.00 - 8.00	8.3	24.8	1356@51	21.4	580 A A
	215/50R17	24390156	95W	BW	XL	11/32	7.00	6.00 - 7.50	8.7	25.7	1521@51	23.0	580 A A
	215/55R17	24470117	98V	BW	XL	11/32	7.00	6.00 - 7.50	8.8	26.3	1653@51	24.5	720 A A
	215/60R17	24567012	100H	BW	XL	11/32	6.50	6.00 - 7.50	8.8	27.1	1764@51	25.6	720 A A
	215/65R17	24556902	103H	BW	XL	11/32	6.50	6.00 - 7.50	8.7	27.9	1929@51	26.9	720 A A
	225/45R17	24977043	94W	BW	XL	11/32	7.50	7.00 - 8.50	8.8	25.1	1477@51	23.2	580 A A
	225/50R17	24395025	98V	BW	XL	11/32	7.00	6.00 - 8.00	9.0	26.0	1653@51	24.2	720 A A
	225/55R17	24475026	101V	BW	XL	11/32	7.00	6.00 - 8.00	9.0	26.9	1819@51	25.8	720 A A
	225/60R17	24685013	103V	BW	XL	11/32	6.50	6.00 - 8.00	9.1	27.7	1929@51	27.5	720 A A
	225/65R17	24557021	106H	BW	XL	11/32	6.50	6.00 - 8.00	8.9	28.4	2094@51	28.2	720 A A
	235/45R17	24980029	97W	BW	XL	11/32	8.00	7.50 - 9.00	9.3	25.4	1609@51	24.4	580 A A
	235/55R17	24480016	103W	BW	XL	11/32	7.50	6.50 - 8.50	9.6	27.3	1929@51	28.1	720 A A
	235/60R17	24552706	106H	BW	XL	11/32	7.00	6.50 - 8.50	9.5	28.1	2094@51	30.0	720 A A
	235/65R17	24667018	108H	BW	XL	11/32	7.00	6.50 - 8.50	9.6	28.2	2205@51	30.9	720 A A
	225/40R18	24077034	92W	BW	XL	11/32	8.00	7.50 - 9.00	9.0	25.3	1389@51	23.3	580 A A
	225/45R18	24990019	95W	BW	XL	11/32	7.50	7.00 - 8.50	8.7	26.1	1521@51	24.4	580 A A
	225/50R18	24558009	99W	BW	XL	11/32	7.00	6.00 - 8.00	9.0	27.0	1709@51	25.9	580 A A
	225/55R18	24559010	102V	BW	XL	11/32	7.00	6.00 - 8.00	9.1	27.8	1874@51	27.2	720 A A
225/60R18	24496808	104V	BW	XL	11/32	6.50	6.00 - 8.00	8.9	28.7	1984@51	29.2	720 A A	
18"	235/45R18	24998012	98W	BW	XL	11/32	8.00	7.50 - 9.00	9.3	26.5	1653@51	25.5	580 A A
	235/50R18	24410012	101W	BW	XL	11/32	7.50	6.50 - 8.50	9.5	27.4	1819@51	27.3	580 A A
	235/55R18	24496708	104V	BW	XL	11/32	7.50	6.50 - 8.50	9.6	28.2	1984@51	29.1	720 A A
	235/60R18	24583211	107V	BW	XL	11/32	7.00	6.50 - 8.50	9.4	29.1	2150@51	31.3	720 A A
	235/65R18	24658006	106V	BW	SL	11/32	7.00	6.50 - 8.50	9.4	30.1	2094@51	33.8	720 A A
	245/40R18	24082025	97W	BW	XL	11/32	8.50	8.00 - 9.50	9.6	25.9	1609@51	25.4	580 A A
	245/45R18	24995022	100W	BW	XL	11/32	8.00	7.50 - 9.00	9.6	26.9	1764@51	26.9	580 A A
	245/60R18	24376006	105V	BW	SL	11/32	7.00	7.00 - 8.50	9.9	29.6	2039@51	33.8	720 A A
	255/65R18	24627007	115H	BW	XL	11/32	7.50	7.00 - 9.00	10.3	31.2	2679@51	37.3	720 A A
	225/55R19	24988007	103V	BW	XL	11/32	7.00	6.00 - 8.00	9.0	28.7	1929@51	28.8	720 A A
	235/40R19	24861007	96V	BW	XL	11/32	8.50	8.00 - 9.50	9.3	26.7	1565@51	26.4	580 A A
	235/55R19	24497006	105W	BW	XL	11/32	7.50	6.50 - 8.50	9.5	29.1	2039@51	30.5	720 A A
19"	245/40R19	24083110	98W	BW	XL	11/32	8.50	8.00 - 9.50	9.5	27.0	1653@51	26.7	580 A A
	255/60R19	24628005	113H	BW	XL	11/32	7.50	7.00 - 9.00	10.3	31.2	2535@51	35.9	720 A A
	235/55R20	24498005	105V	BW	XL	11/32	7.50	6.50 - 8.50	9.6	30.2	2039@51	32.7	720 A A
	245/45R20	24087011	103W	BW	XL	11/32	8.00	7.50 - 9.00	9.5	28.9	1929@51	30.7	580 A A
	245/50R20	24374008	105V	BW	XL	11/32	7.50	7.00 - 8.50	9.8	29.9	2039@51	32.5	580 A A
20"	255/50R20	24502006	109W	BW	XL	11/32	8.00	7.00 - 9.00	10.4	30.2	2271@51	34.5	580 A A
	255/55R20	24503204	110V	BW	XL	11/32	8.00	7.00 - 9.00	10.4	31.1	2337@51	36.0	720 A A
	265/50R20	24652011	111V	BW	XL	11/32	8.50	7.50 - 9.50	10.8	30.6	2403@51	35.8	580 A A

* 80K Mile Limited Warranty on T-speed ratings / 70K Mile Limited Warranty on H, V and W-speed ratings.

† Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



MILETECH® ADVANCED COMPOUND TECHNOLOGY
Delivers enhanced durability while improving handling in wet conditions.



WET TRACTION
Elaborate siping and enhanced tread design allows for superior water dispersion.



ALL-SEASON
Pattern design and MILETECH® silica compound for year-round driving confidence.



COUPES, SEDANS, AND CUVS
Designed for a variety of today's vehicles, including coupes, sedans, and CUVs.

WEATHERGUARD AW365

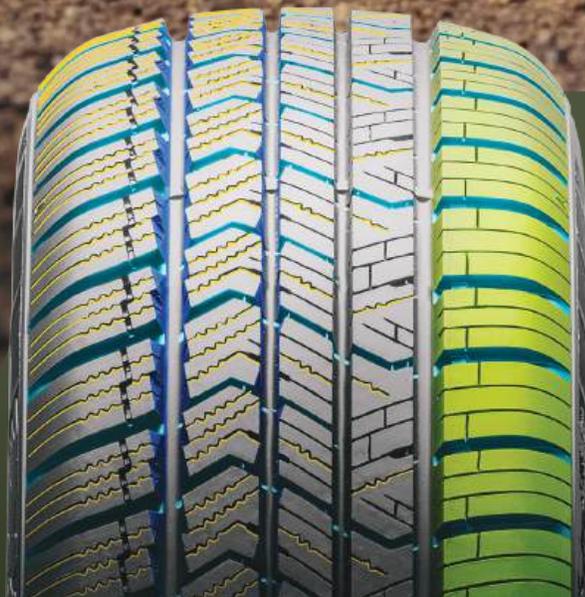
• ALL-WEATHER PERFORMANCE • PASSENGER



Looking for the true all-weather tire? Look no further. The **WEATHERGUARD AW365** incorporates the latest in tread design technology, fused with an advanced silica-rich compound. Utilizing interlocking circumferential blocks to provide excellent traction and aid with directional stability, while angled tread notches reduce noise and improve overall tread life. Variable depth siping and large notched lateral grooves allow for water evacuation, while 3D siping integrated into the tread blocks improves stability and traction during inclement conditions. All sizes carry the Three-Peak Mountain Snowflake (3PMS*) symbol and are rated for snow conditions, while being backed by a 50K Mile Limited Warranty. The WEATHERGUARD AW365 will survive the harsh winter, the scorching summer, and provide year-round driving confidence.



SHOWN: SUBARU® CROSSTREK - WEATHERGUARD AW365 - 225/55R17



3D SIPING
Improves braking and control on icy, wet, and dry roads.



COUPLING TREAD BLOCKS
Provides overall stability and control.



CONSTANT LATERAL GROOVE
Evacuates water and increases wet traction.



ANGLED TREAD NOTCHES
Enhances traction while also reducing noise and improving overall tread life.

PERFORMANCE RATINGS[†]





Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
15"	185/60R15	24616016	88H	BW	XL	11/32	5.50	5.00 - 6.50	7.4	23.7	1235@50	18.7	500 A A
	185/65R15	24525043	92H	BW	XL	11/32	5.50	5.00 - 6.50	7.4	24.4	1389@50	19.9	500 A A
	195/60R15	24635043	92H	BW	XL	11/32	6.00	5.50 - 7.00	7.9	24.2	1389@50	20.2	500 A A
	195/65R15	24530052	95H	BW	XL	11/32	6.00	5.50 - 7.00	7.9	25.0	1521@50	20.7	500 A A
16"	205/55R16	24460050	94V	BW	XL	11/32	6.50	5.50 - 7.50	8.4	24.9	1477@50	22.0	500 A A
	205/60R16	24653028	96H	BW	XL	11/32	6.00	5.50 - 7.50	8.2	25.7	1685@50	23.3	500 A A
	205/65R16	24555010	99H	BW	XL	11/32	6.00	5.50 - 7.50	8.2	26.5	1709@50	24.7	500 A A
	215/60R16	24655034	99V	BW	XL	11/32	6.50	6.00 - 7.50	8.7	26.1	1709@50	25.0	500 A A
	215/65R16	24560027	102H	BW	XL	11/32	6.50	6.00 - 7.50	8.7	27.0	1874@50	26.0	500 A A
	215/70R16	24156009	100H	BW	SL	11/32	6.50	5.50 - 7.00	8.7	27.9	1764@44	26.9	500 A A
17"	225/60R16	24665036	98H	BW	SL	11/32	6.50	6.00 - 8.00	9.0	26.6	1653@44	25.9	500 A A
	205/50R17	24385103	93H	BW	XL	11/32	6.50	5.50 - 7.50	8.4	25.1	1433@50	22.9	500 A A
	215/55R17	24470116	98V	BW	XL	11/32	7.00	6.00 - 7.50	8.9	26.3	1653@50	26.1	500 A A
	225/50R17	24395023	98V	BW	XL	11/32	7.00	6.00 - 8.00	9.2	25.9	1653@50	26.6	500 A A
	225/55R17	24475025	101V	BW	XL	11/32	7.00	6.00 - 8.00	9.2	26.8	1819@50	27.4	500 A A
	225/60R17	24685014	99V	BW	SL	11/32	6.50	6.00 - 8.00	9.0	27.6	1709@44	27.3	500 A A
	225/65R17	24557015	106H	BW	XL	11/32	6.50	6.00 - 8.00	9.0	28.5	2094@50	28.4	500 A A
	235/55R17	24480014	103H	BW	XL	11/32	7.50	6.50 - 8.50	9.6	27.2	1929@50	28.7	500 A A
	235/65R17	24657014	108H	BW	XL	11/32	7.00	6.50 - 8.50	9.4	29.1	2205@50	29.8	500 A A
	245/65R17	24552516	111H	BW	XL	11/32	7.00	7.00 - 8.50	9.8	29.5	2403@50	31.3	500 A A
18"	225/45R18	24990018	95V	BW	XL	11/32	7.50	7.00 - 8.50	8.9	25.9	1521@50	24.3	500 A A
	225/55R18	24559009	102V	BW	XL	11/32	7.00	6.00 - 8.00	9.2	27.8	1874@50	28.9	500 A A
	225/60R18	24000067	104V	BW	XL	11/32	6.50	6.00 - 8.00	9.0	28.6	1984@50	28.5	500 A A
	235/45R18	24998011	98V	BW	XL	11/32	8.00	7.50 - 9.00	9.3	26.3	1653@50	26.0	500 A A
	235/50R18	24410011	101V	BW	XL	11/32	7.50	6.50 - 8.50	9.6	27.3	1819@50	29.4	500 A A
	235/55R18	24000068	104V	BW	XL	11/32	7.50	6.50 - 8.50	9.6	28.1	1984@50	29.9	500 A A
	235/60R18	24000071	107V	BW	XL	11/32	7.00	6.50 - 8.50	9.4	29.1	2149@50	30.8	500 A A
	235/65R18	24658007	110V	BW	XL	11/32	7.00	6.50 - 8.50	9.4	30.0	2337@50	31.6	500 A A
	245/55R18	24000073	103V	BW	SL	11/32	7.50	7.00 - 8.50	10.0	28.6	1929@44	32.2	500 A A
	245/60R18	24000074	105H	BW	SL	11/32	7.00	7.00 - 8.50	9.8	29.6	2039@44	31.1	500 A A
	255/55R18	24995109	109V	BW	XL	11/32	8.00	7.00 - 9.00	10.4	29.0	2271@50	34.2	500 A A
	265/65R18	24000075	111H	BW	SL	11/32	7.50	7.00 - 9.00	10.2	31.1	2403@44	35.2	500 A A
	265/60R18	24583313	114V	BW	XL	11/32	8.00	7.50 - 9.50	10.7	30.5	2601@50	35.6	500 A A
	19"	225/55R19	24000076	103V	BW	XL	11/32	7.00	6.00 - 8.00	9.2	28.8	1929@50	30.1
235/40R19		24000077	96V	BW	XL	11/32	8.50	8.00 - 9.50	9.5	26.4	1565@50	27.4	500 A A
235/55R19		24000069	105V	BW	XL	11/32	7.50	6.50 - 8.50	9.6	29.2	2039@50	31.1	500 A A
20"	235/55R20	24000070	105V	BW	XL	11/32	7.50	6.50 - 8.50	9.6	30.2	2039@50	32.4	500 A A
	245/50R20	24000072	102V	BW	SL	11/32	7.50	7.00 - 8.50	10.0	29.7	1874@44	33.5	500 A A

* This tire is designed for severe snow conditions and meets the DOT snow traction performance requirements.

† Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



THREE-PEAK MOUNTAIN SNOWFLAKE
3PMS*-rated performance in severe snow conditions.



SNOW TRACTION
Elaborate siping and enhanced tread design allows for superior snow traction.



ALL-WEATHER
Pattern design and tread compound enhanced for year-round driving confidence.



S, H, & V RATED
S, H, & V-speed rated performance.

INTERCEPTOR AS810

• ULTRA-HIGH PERFORMANCE ALL-SEASON • PASSENGER



The **INTERCEPTOR AS810** is an ultra-high performance tire designed for optimal performance all year long. The optimized inside tread pattern includes a multitude of features designed to maximize the driving experience during dry and wet conditions. The large outside shoulder tread blocks increase cornering stability for improved handling, while micro siping provides stability and all-season driving confidence. Backed by a 50K Mile Limited Warranty, the AS810 delivers the best balance of performance and value.



SHOWN: NISSAN 370Z - INTERCEPTOR AS810
FRONT: 225/40ZR18 - REAR: 245/40ZR18



- 
LARGE SHOULDER TREAD BLOCKS
Increases cornering stability for improved handling.
- 
OPTIMIZED INSIDE TREAD PATTERN
Enhances wet, dry, and winter traction.
- 
ANGLED TREAD NOTCHES
Enhances traction while also reducing noise and improving overall tread life.
- 
ADAPTIVE 3D SIPES
Provides stability and traction in both wet and dry conditions.

PERFORMANCE RATINGS*



Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width [Measured]	Rim Width [Approved]	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
17"	205/50ZR17	24385018	93W	BW	XL	10/32	6.50	5.50 - 7.50	8.4	25.1	1433@50	22.4	500 A A
	215/45ZR17	24975028	91W	BW	XL	10/32	7.00	7.00 - 8.00	8.4	24.6	1356@50	21.6	500 A A
	225/45ZR17	24977042	94Y	BW	XL	10/32	7.50	7.00 - 8.50	8.9	25.0	1477@50	23.3	500 A A
	225/50ZR17	24395022	98W	BW	XL	10/32	7.00	6.00 - 8.00	9.2	25.9	1653@50	25.7	500 A A
18"	225/40ZR18	24077033	92Y	BW	XL	10/32	8.00	7.00 - 9.00	9.1	25.1	1389@50	23.3	500 A A
	225/45ZR18	24990017	95Y	BW	XL	10/32	7.50	7.00 - 8.50	8.9	25.9	1521@50	24.3	500 A A
	235/40ZR18	24080030	95Y	BW	XL	10/32	8.50	8.00 - 9.50	9.5	25.4	1521@50	24.7	500 A A
	235/45ZR18	24998010	98Y	BW	XL	10/32	8.00	7.00 - 8.50	9.3	26.3	1653@50	26.8	500 A A
	245/35ZR18	24055007	92Y	BW	XL	10/32	8.50	8.00 - 9.50	9.8	24.8	1389@50	23.5	500 A A
	245/40ZR18	24082023	97Y	BW	XL	10/32	8.50	8.00 - 9.50	9.8	25.7	1609@50	26.9	500 A A
	245/45ZR18	24995020	100Y	BW	XL	10/32	9.00	7.50 - 9.00	9.6	26.7	1764@50	28.5	500 A A
	255/35ZR18	24045015	94Y	BW	XL	10/32	8.00	8.50 - 10.00	10.2	25.0	1477@50	24.7	500 A A
	255/40ZR18	24848008	99Y	BW	XL	10/32	9.00	8.50 - 10.00	10.2	26.0	1709@50	28.3	500 A A
	265/35ZR18	24000045	97Y	BW	XL	11/32	9.50	9.00 - 10.50	10.7	25.3	1609@50	26.9	500 A A
	275/35ZR18	24000054	99Y	BW	XL	11/32	9.50	9.00 - 11.00	10.9	25.6	1709@50	28.3	500 A A
	285/35ZR18	24000055	101Y	BW	XL	10/32	10.00	9.50 - 11.00	11.4	25.9	1819@50	29.4	500 A A
19"	225/40ZR19	24078006	93Y	BW	XL	10/32	8.00	7.50 - 9.00	9.1	26.1	1433@50	24.2	500 A A
	225/45ZR19	24853003	96W	BW	XL	10/32	7.50	7.00 - 8.50	8.9	27.0	1565@50	24.9	500 A A
	235/35ZR19	24000046	91Y	BW	XL	10/32	8.50	8.00 - 9.50	9.5	25.5	1356@50	23.3	500 A A
	235/40ZR19	24851005	96W	BW	XL	10/32	8.50	8.00 - 9.50	9.5	26.4	1565@50	26.3	500 A A
	235/45ZR19	24880802	99W	BW	XL	10/32	8.00	7.50 - 9.00	9.3	27.4	1709@50	28.0	500 A A
	245/35ZR19	24054009	93Y	BW	XL	10/32	8.50	8.00 - 9.50	9.8	25.8	1433@50	25.0	500 A A
	245/40ZR19	24083109	98Y	BW	XL	10/32	8.50	8.00 - 9.50	9.8	26.7	1653@50	28.1	500 A A
	245/45ZR19	24996010	102Y	BW	XL	10/32	8.00	7.50 - 9.00	9.6	27.7	1874@50	30.1	500 A A
	245/50ZR19	24864002	105W	BW	XL	10/32	7.50	7.00 - 8.50	10.0	28.7	2039@50	31.8	500 A A
	255/35ZR19	24000078	96Y	BW	XL	10/32	9.00	8.50 - 10.00	10.2	26.0	1565@50	27.0	500 A A
	255/40ZR19	24849004	100Y	BW	XL	10/32	9.00	8.50 - 10.00	10.2	27.0	1764@50	29.5	500 A A
	265/35ZR19	24000029	98Y	BW	XL	11/32	9.50	9.00 - 10.50	10.7	26.3	1653@50	27.8	500 A A
	265/50ZR19	24000313	110W	BW	XL	10/32	8.50	7.50 - 9.50	10.9	29.5	2337@50	35.0	500 A A
	275/35ZR19	24062007	100Y	BW	XL	11/32	9.50	9.00 - 11.00	10.9	26.6	1764@50	29.8	500 A A
	275/40ZR19	24736009	105Y	BW	XL	11/32	9.50	9.00 - 11.00	10.9	27.7	2039@50	32.4	500 A A
	275/55ZR19	24878003	111W	BW	SL	11/32	8.50	7.50 - 9.50	11.2	30.9	2403@44	38.1	500 A A
	305/30ZR19	24000065	102Y	BW	XL	11/32	11.00	10.50 - 11.50	12.3	26.3	1874@50	31.6	500 A A
	20"	225/35ZR20	24000034	90Y	BW	XL	10/32	8.00	7.50 - 9.00	9.1	26.2	1323@50	23.6
235/35ZR20		24000047	92Y	BW	XL	10/32	8.50	8.00 - 9.50	9.5	26.5	1389@50	24.7	500 A A
245/35ZR20		24080014	95Y	BW	XL	10/32	8.50	8.00 - 9.50	9.8	26.8	1521@50	26.3	500 A A
245/40ZR20		24085006	99Y	BW	XL	10/32	8.50	8.00 - 9.50	9.8	27.7	1709@50	29.3	500 A A
245/45ZR20		24087009	103Y	BW	XL	10/32	8.00	7.50 - 9.00	9.6	28.7	1929@50	30.9	500 A A
255/30ZR20		24000035	92Y	BW	XL	10/32	9.00	8.50 - 9.50	10.2	26.1	1389@50	27.4	500 A A
255/35ZR20		24000043	97Y	BW	XL	10/32	9.00	8.50 - 10.00	10.2	27.0	1609@50	28.2	500 A A
255/40ZR20		24123401	101Y	BW	XL	10/32	9.00	8.50 - 10.00	10.2	28.0	1819@50	30.8	500 A A
255/45ZR20		24984009	105Y	BW	XL	10/32	8.50	8.00 - 9.50	10.0	29.1	2039@50	32.5	500 A A
265/35ZR20		24000037	99Y	BW	XL	11/32	9.50	9.00 - 10.50	10.7	27.3	1709@50	29.5	500 A A
265/45ZR20		24622003	108Y	BW	XL	11/32	9.00	8.50 - 10.00	10.5	29.4	2205@50	33.5	500 A A
275/30ZR20		24000036	97Y	BW	XL	11/32	9.50	9.00 - 10.00	10.9	26.5	1609@50	29.3	500 A A
275/35ZR20		24735007	102Y	BW	XL	11/32	9.50	9.00 - 11.00	10.9	27.6	1874@50	30.8	500 A A
275/40ZR20		24084011	106Y	BW	XL	11/32	9.50	9.00 - 11.00	10.9	28.7	2094@50	33.9	500 A A
275/45ZR20		24000032	110Y	BW	XL	11/32	9.00	8.50 - 10.50	10.7	29.8	2337@50	35.1	500 A A
285/30ZR20		24000056	99Y	BW	XL	10/32	10.00	9.50 - 10.50	11.4	26.8	1709@50	30.9	500 A A
285/50ZR20		24000066	116W	BW	XL	11/32	9.00	8.00 - 10.00	11.7	31.3	2756@50	38.4	500 A A
305/30ZR20		24000057	103Y	BW	XL	11/32	11.00	10.50 - 11.50	12.3	27.2	1929@50	33.0	500 A A
315/35ZR20		24000058	110Y	BW	XL	11/32	11.00	10.50 - 12.50	12.6	28.7	2337@50	35.6	500 A A
21"		245/35ZR21	24000059	96Y	BW	XL	10/32	8.50	8.00 - 9.50	9.8	27.8	1565@50	27.0
	265/35ZR21	24000060	101Y	BW	XL	11/32	9.50	9.00 - 10.50	10.7	28.3	1819@50	31.6	500 A A
	265/40ZR21	24000048	105Y	BW	XL	11/32	9.50	9.00 - 10.50	10.7	29.3	2039@50	33.0	500 A A
	275/40ZR21	24000049	107Y	BW	XL	11/32	9.50	9.00 - 11.00	10.9	29.6	2149@50	34.5	500 A A
	275/45ZR21	24000044	110Y	BW	XL	11/32	9.00	8.50 - 10.50	10.7	30.7	2337@50	36.5	500 A A
	295/35ZR21	24000061	107Y	BW	XL	10/32	10.50	10.00 - 11.50	11.9	29.1	2149@50	35.3	500 A A
22"	235/30ZR22	24000062	90W	BW	XL	10/32	8.50	8.00 - 9.00	9.5	27.6	1323@50	26.7	500 A A
	245/30ZR22	24000050	92W	BW	XL	10/32	8.50	8.00 - 9.00	9.8	27.8	1389@50	27.6	500 A A
	255/30ZR22	24000051	95Y	BW	XL	10/32	9.00	8.50 - 9.50	10.2	28.1	1521@50	27.7	500 A A
	265/30ZR22	24000052	97Y	BW	XL	10/32	9.50	9.00 - 10.00	10.7	28.3	1609@50	31.2	500 A A
	265/35ZR22	24072006	102W	BW	XL	11/32	9.50	9.00 - 10.50	10.7	29.3	1874@50	33.3	500 A A
	285/40ZR22	24000053	110Y	BW	XL	10/32	10.00	9.00 - 11.00	11.4	31.0	2337@50	38.4	500 A A
	295/25ZR22	24000063	97Y	BW	XL	10/32	10.50	10.00 - 11.00	11.9	27.8	1609@50	33.0	500 A A
	295/30ZR22	24000064	103Y	BW	XL	10/32	10.50	10.00 - 11.00	11.9	29.0	1929@50	35.3	500 A A
305/40ZR22	24671004	114W	BW	XL	11/32	11.00	10.00 - 12.00	12.3	31.6	2601@50	41.2	500 A A	
24"	305/35ZR24	24681003	112W	BW	XL	11/32	11.00	10.00 - 12.00	12.3	32.4	2469@50	41.9	500 A A

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



MILETECH® ADVANCED S-COMPOUND
Formulated with advanced silica to deliver maximum control and high-performance driving year-round.



ULTRA-HIGH PERFORMANCE
Ultra-high performance, asymmetrical tread design provides improved wet and dry traction in all seasons.



ALL-SEASON
Pattern design and tread compound enhanced for seasonal conditions.



WET & DRY TRACTION
Enhanced wet & dry performance with superior handling.

WINTERGUARD

• STUDDABLE • PASSENGER



Engineered for harsh winter conditions, the all-new Milestar **Winterguard** studdable tire is built to take on challenging cold-weather terrain with confidence. An advanced tread design provides enhanced grip, stability, and comfort when temperatures drop. Backed by a standard limited mileage warranty, the Milestar Winterguard is designed specifically for the season's most demanding winter conditions.



SHOWN: SUBARU® IMPREZA - WINTERGUARD 205/55R16



OPTIMIZED LATERAL GROOVES

Effectively channels water and slush away to enhance stability, traction, and safety in winter weather.



ADVANCED 3D SIPING

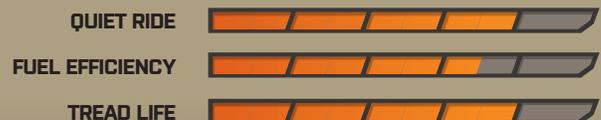
Enhances traction and shortens braking distances for precise handling and superior control on ice and snow.



FACTORY STUDDABLE/TUDDABLE TREAD BLOCKS

Allows for studs to be added for enhanced traction on icy and snow-packed roads.

PERFORMANCE RATINGS[‡]



Wheel Diameter	Size	Item Number [Studdable]	Item Number [Factory Studded]	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width [Measured]	Rim Width [Approved]	Section Width	Overall Diameter	Max Load	Approximate Weight	
14"	175/65R14	24000156	24000216	82T	BW	SL	13/32	5.00	5.00 - 6.00	7.0	23.0	1047@44	17.0	
	175/70R14	24000155	24000215	84T	BW	SL	13/32	5.00	4.50 - 6.00	7.0	23.7	1102@44	17.2	
	185/65R14	24000157	24000217	86T	BW	SL	13/32	5.50	5.00 - 6.50	7.4	23.5	1168@44	18.1	
	185/70R14	24000158	24000218	88T	BW	SL	13/32	5.50	4.50 - 6.00	7.4	24.3	1235@44	18.7	
15"	175/65R15	24000159	24000219	84T	BW	SL	13/32	5.00	5.00 - 6.00	7.0	24.0	1102@44	17.9	
	185/65R15	24000160	24000220	82T	BW	SL	13/32	6.00	5.00 - 6.50	7.6	23.0	1047@44	18.5	
	185/60R15	24000161	24000221	84T	BW	SL	13/32	5.50	5.00 - 6.50	7.4	23.7	1102@44	18.5	
	185/65R15	24000162	24000222	92T	BW	XL	13/32	5.50	5.00 - 6.50	7.4	24.5	1389@50	19.6	
	195/60R15	24000163	24000223	88T	BW	SL	13/32	6.00	5.50 - 7.00	7.9	24.2	1235@44	19.8	
	195/65R15	24000164	24000224	95H	BW	XL	13/32	6.00	5.50 - 7.00	7.9	25.0	1521@50	20.7	
	205/65R15	24000165	24000225	94T	BW	SL	13/32	6.00	5.50 - 7.50	8.2	25.5	1477@44	21.6	
	215/70R15	24000166	24000226	98T	BW	SL	13/32	6.50	5.50 - 7.00	8.7	26.9	1653@44	24.0	
16"	205/65R16	24000167	24000227	94H	BW	XL	13/32	6.50	5.50 - 7.50	8.4	24.9	1477@50	22.3	
	205/60R16	24000168	24000228	96H	BW	XL	13/32	6.00	5.50 - 7.50	8.2	25.7	1565@50	22.3	
	205/65R16	24000169	24000229	95T	BW	SL	13/32	6.00	5.50 - 7.50	8.2	26.5	1521@50	23.8	
	215/55R16	24000170	24000230	97H	BW	XL	13/32	7.00	6.00 - 7.50	8.9	25.3	1609@50	23.8	
	215/60R16	24000171	24000231	95T	BW	SL	13/32	6.50	6.00 - 7.50	8.7	26.1	1521@44	24.3	
	215/65R16	24000172	24000232	98T	BW	SL	13/32	6.50	6.00 - 7.50	8.7	27.0	1653@44	25.4	
	215/70R16	24000196	24000256	100S	BW	SL	13/32	6.50	5.50 - 7.00	8.7	27.9	1764@44	26.9	
	225/60R16	24000173	24000233	98T	BW	SL	13/32	6.50	6.00 - 8.00	9.0	26.6	1653@44	24.7	
	225/65R16	24000174	24000234	100T	BW	SL	13/32	6.50	6.00 - 8.00	9.0	27.5	1764@44	26.5	
	235/65R16	24000175	24000235	103T	BW	SL	13/32	7.00	6.50 - 8.50	9.5	28.0	1929@44	29.8	
	235/70R16	24000176	24000236	106S	BW	SL	13/32	7.00	6.00 - 8.00	9.5	29.0	2094@44	30.0	
	17"	215/45R17	24000177	24000237	91T	BW	XL	13/32	7.00	7.00 - 8.00	8.4	24.7	1356@50	22.1
215/50R17		24000178	24000238	95T	BW	XL	13/32	7.00	6.00 - 7.50	8.9	25.5	1521@50	23.6	
215/55R17		24000179	24000239	98H	BW	XL	13/32	7.00	6.00 - 7.50	8.9	26.3	1653@50	24.7	
215/60R17		24000180	24000240	96T	BW	SL	13/32	6.50	6.00 - 7.50	8.7	27.2	1565@44	25.6	
215/65R17		24000181	24000241	99T	BW	SL	13/32	6.50	6.00 - 7.50	8.7	28.0	1709@44	26.9	
225/45R17		24000182	24000242	94H	BW	XL	13/32	7.50	7.00 - 8.50	8.9	25.0	1477@50	23.2	
225/50R17		24000183	24000243	98H	BW	XL	13/32	7.00	6.00 - 8.00	9.2	25.9	1653@50	26.0	
225/55R17		24000184	24000244	101H	BW	XL	13/32	7.00	6.00 - 8.00	9.2	26.8	1819@50	27.3	
225/60R17		24000185	24000245	99T	BW	SL	13/32	6.50	6.00 - 8.00	9.0	27.6	1709@44	26.2	
225/65R17		24000186	24000246	106T	BW	XL	13/32	6.50	6.00 - 8.00	9.0	28.5	2094@50	28.7	
235/55R17		24000187	24000247	99H	BW	SL	13/32	7.50	6.50 - 8.50	9.7	27.2	1709@44	28.0	
235/60R17		24000188	24000248	102T	BW	SL	13/32	7.00	6.50 - 8.50	9.5	28.1	1874@44	28.9	
235/65R17		24000197	24000257	104S	BW	SL	13/32	7.00	6.50 - 8.50	9.4	29.1	1984@44	30.0	
265/70R17		24000198	24000258	115S	BW	SL	13/32	8.00	7.00 - 9.00	10.7	31.7	2679@44	40.0	
18"		215/45R18	24000199	24000259	93H	BW	XL	13/32	7.00	7.00 - 8.00	8.4	25.6	1433@50	24.5
		225/40R18	24000189	24000249	92H	BW	XL	13/32	8.00	7.50 - 9.00	9.1	25.1	1389@50	22.5
	225/45R18	24000190	24000250	95T	BW	XL	13/32	7.50	7.00 - 8.50	8.9	25.9	1521@50	24.3	
	225/50R18	24000200	24000260	99H	BW	XL	13/32	7.00	6.00 - 8.00	9.2	26.9	1709@50	27.1	
	225/55R18	24000191	24000251	98T	BW	SL	13/32	7.00	6.00 - 8.00	9.2	27.8	1653@44	26.5	
	225/60R18	24000192	24000252	100T	BW	SL	13/32	6.50	6.00 - 8.00	9.0	28.6	1764@44	28.0	
	235/45R18	24000201	24000261	98H	BW	XL	13/32	8.00	7.50 - 9.00	9.3	26.3	1653@50	26.0	
	235/50R18	24000193	24000253	101T	BW	XL	13/32	7.50	6.50 - 8.50	9.7	27.3	1819@50	28.2	
	235/55R18	24000194	24000254	104H	BW	XL	13/32	7.50	6.50 - 8.50	9.7	28.2	1984@50	29.8	
	235/60R18	24000202	24000262	103H	BW	SL	13/32	7.00	6.50 - 8.50	9.4	29.1	1929@44	30.3	
	235/65R18	24000203	24000263	106T	BW	SL	13/32	7.00	6.50 - 8.50	9.4	30.0	2094@44	33.7	
	245/60R18	24000204	24000264	105T	BW	SL	13/32	7.00	7.00 - 8.50	9.8	29.6	2099@44	34.0	
275/65R18	24000205	24000265	116S	BW	SL	13/32	8.00	7.50 - 9.00	11.0	32.1	2756@44	43.3		
19"	235/40R19	24000206	24000266	96H	BW	XL	13/32	8.50	8.00 - 9.50	9.5	26.4	1565@50	26.1	
	235/45R19	24000207	24000267	95H	BW	SL	13/32	8.00	7.50 - 9.00	9.3	27.4	1521@44	27.3	
	235/55R19	24000195	24000255	105H	BW	XL	13/32	7.50	6.50 - 8.50	9.7	29.2	2039@50	30.4	
20"	235/55R20	24000208	24000268	105H	BW	XL	13/32	7.50	6.50 - 8.50	9.6	30.2	2039@50	32.4	
	245/50R20	24000209	24000269	102T	BW	SL	13/32	7.50	7.00 - 8.50	10.0	29.7	1874@44	35.0	
	255/45R20	24000210	24000270	105V	BW	XL	13/32	8.50	8.00 - 9.50	10.0	29.1	2039@50	32.2	
	255/50R20	24000211	24000271	105V	BW	SL	13/32	8.00	7.00 - 9.00	10.4	30.1	2039@44	35.5	
	255/55R20	24000212	24000272	107H	BW	SL	13/32	8.00	7.00 - 9.00	10.4	31.0	2149@44	37.3	
	275/55R20	24000213	24000273	117T	BW	XL	13/32	8.50	7.50 - 9.50	11.2	31.9	2833@50	44.7	
275/60R20	24000214	24000274	116S	BW	XL	13/32	8.00	7.50 - 9.50	11.0	33.0	2756@50	46.6		

* This tire is designed for severe snow conditions and meets the DOT snow traction performance requirements.

† This tire is designed for severe ice conditions and meets the DOT ice traction performance requirements.

‡ Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



CERTIFIED ICE GRIP SYMBOL

Independently tested and certified for superior traction and braking on ice, ensuring proven safety in extreme winter conditions.



THREE-PEAK MOUNTAIN SNOWFLAKE

3PMS*-rated performance in severe snow conditions.



MILETECH® ADVANCED COMPOUND TECHNOLOGY

Engineered for exceptional grip and reliable braking, ensuring confidence in freezing, wet conditions.



S, T, H, & V RATED

S, T, H, & V-speed rated performance.

STREETSTEEL

• CLASSIC PERFORMANCE • PASSENGER



The **STREETSTEEL** answers the muscle car enthusiast looking for a tire with modern engineering and classic styling cues of years past. The **STREETSTEEL** includes a checkered flag inspired sidewall design with solid white lettering, recalling the heydays when hot rodding and Detroit muscle ruled the highways and byways of America. The contemporary all-season tread design delivers improved cornering and steering stability, while the angled siping pattern and four circumferential grooves provide a wide contact patch for superior grip and wet performance. The **STREETSTEEL** provides retro performance ready for daily commutes or the weekend show-n-go.








SHOWN: CHEVROLET® CAMARO - STREETSTEEL
FRONT: P215/60R15 · REAR: P235/60R15



-  **RAISED WHITE LETTERING**
Adds additional style to the classic sidewall.
-  **ANGLED SHOULDER DESIGN**
Improves cornering capabilities and steering stability.
-  **ANGLED SIPING AND NOTCHED CENTER RIB**
Increases stability and provides excellent grip in all conditions.
-  **CIRCUMFERENTIAL GROOVES**
Optimizes water evacuation for enhanced wet traction.

PERFORMANCE RATINGS*

DRY HANDLING		QUIET RIDE	
WET PERFORMANCE		FUEL EFFICIENCY	
RIDE COMFORT		TREAD LIFE	



Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width [Measured]	Rim Width [Approved]	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
14"	P225/70R14	24247001	98T	RWL	SL	10/32	6.50	6.00 - 7.50	9.1	26.5	1675@44	25.5	440 A B
	P215/60R15	24645025	93T	RWL	SL	10/32	6.50	6.00 - 7.50	8.7	25.2	1411@44	23.6	440 A B
	P215/65R15	24545027	95T	RWL	SL	10/32	6.50	6.00 - 7.50	8.7	26.0	1510@44	24.9	440 A B
	P215/70R15	24245020	97T	RWL	SL	10/32	6.50	5.50 - 7.00	8.8	26.9	1620@44	25.8	440 A B
15"	P225/70R15	24627502	100T	RWL	SL	10/32	6.50	6.00 - 7.50	9.1	27.4	1753@44	26.8	440 A B
	P235/60R15	24482001	98T	RWL	SL	10/32	7.00	6.50 - 8.50	9.4	26.1	1642@44	26.7	440 A B
	P235/70R15	24252003	102T	RWL	SL	10/32	7.00	6.00 - 8.00	9.4	28.0	1896@44	28.7	440 A B
	P245/60R15	24377501	100T	RWL	SL	10/32	7.00	7.00 - 8.50	9.6	26.6	1753@44	28.0	440 A B
	P255/70R15	24627501	108T	RWL	SL	10/32	7.50	6.50 - 8.50	10.2	29.1	2183@44	32.0	440 A B
	P275/60R15	24370105	107T	RWL	SL	10/32	8.00	7.50 - 9.50	10.9	28.0	2149@44	32.8	440 A B
	P295/50R15	24485001	105S	RWL	SL	10/32	9.50	8.00 - 10.50	12.2	26.7	2061@44	34.2	440 A B

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation. Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



FITMENTS

Designed for a variety of vehicles, including muscle car and classic truck applications.



ALL-SEASON

Pattern design and tread compound enhanced for seasonal conditions.



DURABILITY

Steel-belted construction for durability and performance.



S & T RATED

S & T-speed rated performance.

MS775 TOURING SLE

• ALL-SEASON TOURING • PASSENGER



The **MS775 TOURING SLE** is a modern tire designed for a variety of vehicles. With white wall and black side wall options, this versatile tire looks great for taking the scenic path or cruising around town. Circumferential interlocking tread blocks provide stability and traction while the open shoulder grooves aid in expelling water for a smooth and pleasant ride.



SHOWN: DATSUN® 510 - MS775 TOURING SLE - P175/80R13



INTERLOCKING CIRCUMFERENTIAL BLOCKS
Provides excellent traction and aids in directional stability.



OPEN SHOULDER TREAD BLOCKS
Aids in water evacuation for superior wet weather traction.



CIRCUMFERENTIAL GROOVES
Optimizes water evacuation for enhanced wet traction.



VARIABLE SIPING
Provides consistent traction in inclement weather.

PERFORMANCE RATINGS*





Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width [Measured]	Rim Width [Approved]	Section Width	Overall Diameter	Max Load	Approximate Weight	UTQG
13"	P155/80R13	24000083	79S	WSW	SL	9/32	4.50	4.00 - 5.00	6.2	22.8	959@44	14.0	480 A B
	P175/80R13	24000084	86S	WSW	SL	10/32	5.00	4.50 - 5.50	7.0	24.0	1179@44	16.4	480 A B
14"	P185/75R14	24000081	89S	WSW	SL	10/32	5.00	4.50 - 5.50	7.2	25.0	1290@44	18.1	480 A B
	P195/75R14	24000080	92S	WSW	SL	10/32	5.50	5.00 - 6.00	7.7	25.5	1400@44	19.3	480 A B
	P205/75R14	24000082	95S	WSW	SL	10/32	5.50	5.00 - 6.00	8.0	26.1	1532@44	20.6	480 A B
	P215/70R14	24000079	96S	WSW	SL	10/32	6.50	6.00 - 7.00	8.7	25.9	1554@44	22.6	480 A B
15"	P205/70R15	24000087	95S	WSW	SL	10/32	6.00	5.50 - 6.50	8.2	26.3	1499@44	24.0	480 A B
	P205/75R15	24000088	97S	WSW	SL	10/32	5.50	5.00 - 6.00	8.0	27.1	1598@44	24.5	480 A B
	P215/70R15	24000085	97S	WSW	SL	10/32	6.50	6.00 - 7.00	8.7	26.9	1620@44	25.7	480 A B
	P215/75R15	24000086	100S	WSW	SL	10/32	6.00	5.50 - 6.50	8.5	27.7	1742@44	25.5	480 A B
	P225/75R15	24000089	102S	WSW	SL	10/32	6.00	5.50 - 6.50	8.8	28.3	1874@44	27.3	480 A B
	P235/75R15	24000090	105S	WSW	SL	10/32	6.50	6.00 - 7.00	9.3	28.9	2028@44	28.9	480 A B

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation. Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



WET TRACTION
Elaborate siping and enhanced tread design allows for superior water dispersion.



ALL-SEASON
Pattern design and tread compound enhanced for seasonal conditions.



DURABILITY
Steel-belted construction for durability and performance.



S RATED
S-speed rated performance.

LIGHT TRUCK / SUV TIRE PRODUCT LINEUP

SHOWN: FORD® BRONCO - PATAGONIA M/T-02 - 37X12.50R17LT



PATAGONIA M/T-02
MAXIMUM TRACTION

PATAGONIA X/T
RUGGED-TERRAIN

PATAGONIA A/T PRO
ALL-TERRAIN

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



PATAGONIA A/T R
ALL-TERRAIN

PATAGONIA H/T
ALL-SEASON HIGHWAY

PATAGONIA M/T-02

• MAXIMUM TRACTION • LT / SUV

The **PATAGONIA M/T-02** has been developed around years of feedback from real-world enthusiasts and professional rock crawling competitions, and garners much of the original M/T design, yet integrates all-new internal tire construction and rubber formulated to raise the level of performance. The M/T-02 now integrates cross-directional siping to improve tread block strength and resilience with a more stable footprint while reducing the risk of chunking. Redeveloped from the inside out, the much improved mud terrain integrates Milestar's MILETECH® 3-Ply Sidewall with added rigidity for maximum sidewall durability, yet still pliable and flexible for aired-down bite and rock-crawling grip. A newly formulated silica-enriched tread compound that includes cut and chip resistance, allows for longer tread life without sacrificing off-road traction.



SHOWN: JEEP® JT · PATAGONIA M/T-02 · 38X13.50R17 LT



-  **3-PLY SIDEWALL**
Provides added strength and impact protection.
-  **HIGH VOID TREAD DESIGN**
Promotes self-cleaning capabilities to quickly expel mud and debris.
-  **ANGLED BITING EDGES AND COMPLEX SIPING**
Enhances traction and performance for both on and off-road environments.
-  **STONE EJECTORS**
Integrated to protect against stone retention and drilling.

PERFORMANCE RATINGS*



Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width [Measured]	Rim Width [Approved]	Section Width	Overall Diameter	Max Load [Single]	Max Load [Dual]	Approximate Weight
15"	31X10.50R15LT	22285032	1090	ROBL	C/6	19/32	8.50	7.00 - 9.00	10.6	30.7	2270@50	-	50.0
	33X12.50R15LT	22228006	1090	ROBL	C/6	19/32	10.00	8.00 - 10.50	12.5	32.8	2205@35	-	61.7
	35X12.50R15LT	22228502	1130	ROBL	C/6	19/32	10.00	8.50 - 11.00	12.5	34.8	2535@35	-	67.1
16"	LT265/75R16 [*32X10.50R16LT]	22279052	123/1200	ROBL	E/10	19/32	7.50	7.00 - 9.00	10.5	31.9	3415@80	3085@80	60.0
	LT285/75R16 [*33X11.50R16LT]	22789024	126/1230	ROBL	E/10	19/32	8.00	7.50 - 9.50	11.3	33.1	3750@80	3415@80	64.7
	LT315/75R16 [*35X12.50R16LT]	22790007	121/1180	ROBL	D/8	19/32	9.50	8.00 - 11.00	12.3	34.8	3195@50	2910@50	69.7
17"	33X12.50R17LT	22229008	1140	ROBL	D/8	19/32	10.00	8.50 - 11.00	12.5	32.8	2600@50	-	65.1
	37X12.50R17LT	22050504	1240	ROBL	D/8	19/32	10.00	8.50 - 11.00	12.5	36.8	3525@50	-	73.4
	38X13.50R17LT	22230005	1270	ROBL	D/8	19/32	11.00	8.50 - 11.00	13.6	37.8	3860@50	-	81.8
	40X13.50R17LT	22235006	1280	ROBL	D/8	19/32	11.00	8.50 - 11.00	13.6	39.8	3970@50	-	88.7
	42X14.50R17LT	22250001	1210	ROBL	C/6	19/32	11.50	9.50 - 12.50	14.4	41.8	3195@35	-	96.6
	LT265/70R17 [*32X10.50R17LT]	22810024	123/1200	ROBL	E/10	19/32	8.00	7.00 - 9.00	10.7	31.9	3415@80	3085@80	61.3
	LT285/70R17 [*33X11.50R17LT]	22688026	126/1230	ROBL	E/10	19/32	8.50	7.50 - 9.00	11.5	33.0	3750@80	3415@80	65.3
	LT295/70R17 [*34X12.00R17LT]	22936007	128/1250	ROBL	E/10	19/32	8.50	7.50 - 10.00	11.8	33.5	3970@80	3640@80	67.1
18"	LT315/70R17 [*35X12.50R17LT]	22801006	121/1180	ROBL	D/8	19/32	9.50	8.00 - 11.00	12.7	34.6	3195@50	2910@50	68.8
	33X12.50R18LT	22789502	1220	ROBL	F/12	19/32	10.00	8.50 - 11.00	12.5	32.8	3305@80	-	66.9
	35X12.50R18LT	22229257	1280	ROBL	F/12	19/32	10.00	8.50 - 11.00	12.5	34.8	3970@80	-	73.8
	LT275/65R18 [*32X11.00R18LT]	22772511	123/1200	ROBL	E/10	19/32	8.00	8.00 - 9.50	11.0	32.3	3415@80	3085@80	61.6
20"	LT275/70R18 [*33X11.00R18LT]	22797014	125/1220	ROBL	E/10	19/32	8.00	7.00 - 9.00	11.0	33.4	3640@80	3305@80	65.2
	35X12.50R20LT	22229507	1250	ROBL	F/12	19/32	10.00	8.00 - 11.00	12.5	34.8	3640@80	-	75.2
	37X12.50R20LT	22050603	1280	ROBL	F/12	19/32	10.00	8.50 - 11.00	12.5	36.8	3970@80	-	78.5
	37X13.50R20LT	22050651	1270	ROBL	E/10	19/32	11.00	9.50 - 12.00	13.6	36.8	3850@65	-	79.5
	38X15.50R20LT	22000084	1250	ROBL	D/8	19/32	12.50	11.00 - 14.00	15.6	37.8	3640@50	-	90.6
	42X14.50R20LT	22804000	1250	ROBL	C/6	19/32	11.50	9.50 - 12.50	14.4	41.7	3640@35	-	98.2
	LT275/65R20 [*34X11.00R20LT]	22689316	126/1230	ROBL	E/10	19/32	8.00	8.00 - 9.50	11.0	34.3	3750@80	3415@80	66.2
	LT285/55R20 [*33X11.50R20LT]	22401510	122/1190	ROBL	E/10	19/32	9.00	8.50 - 10.00	11.7	32.6	3305@80	3000@80	65.2
	LT295/60R20 [*34X12.00R20LT]	22935007	126/1230	ROBL	E/10	19/32	8.50	8.50 - 10.50	11.8	34.2	3750@80	3415@80	69.1
	LT305/55R20 [*33X12.50R20LT]	22789707	125/1220	ROBL	F/12	19/32	9.50	8.50 - 11.00	12.4	33.5	3640@80	3305@80	70.2
22"	33X12.50R22LT	22247203	1140	ROBL	F/12	19/32	10.00	8.50 - 11.00	12.5	32.8	2600@80	-	68.0
	35X12.50R22LT	22229704	1210	ROBL	F/12	19/32	10.00	8.50 - 11.00	12.5	34.8	3195@80	-	73.4
	37X13.50R22LT	22371304	1280	ROBL	F/12	19/32	11.00	9.50 - 12.00	13.6	36.8	3970@80	-	85.3

BLACK LABEL

Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width [Measured]	Rim Width [Approved]	Section Width	Overall Diameter	Max Load [Single]	Max Load [Dual]	Approximate Weight
17"	37X12.50R17LT NHS	22050505	1240	ROBL	D/8	19/32	10.00	8.50 - 11.00	12.5	36.8	3525@50	-	75.7
	38X13.50R17LT NHS	22230007	1270	ROBL	D/8	19/32	11.00	9.00 - 11.50	13.6	37.8	3860@50	-	81.8
	40X13.50R17LT NHS	22235007	1280	ROBL	D/8	19/32	11.00	8.50 - 11.00	13.6	39.8	3970@50	-	88.8
	42X14.50R17LT NHS	22000116	1210	ROBL	C/6	19/32	11.50	9.50 - 12.50	14.4	41.8	3195@35	-	95.9
20"	42X14.50R20LT NHS	22804001	1250	ROBL	C/6	19/32	11.50	9.50 - 12.50	14.4	41.7	3640@35	-	98.9

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

† 2-ply sidewall

‡ Similar flotation sizes

§ Non-highway service

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



MILETECH® ADVANCED COMPOUND TECHNOLOGY
Provides added strength, impact protection, and enhanced sidewall engineered for the toughest terrains.



WET TRACTION
Elaborate siping and enhanced tread design allows for superior water dispersion.



EXTREME TERRAIN
Aggressive design and large voids to effectively navigate rough conditions.



Q RATED
Q-speed rated performance.

PATAGONIA X/T

• RUGGED-TERRAIN • LT / SUV



The **PATAGONIA X/T** is designed to tackle your on- and off-road adventures within the Rugged Terrain (R/T) segment. Engineered for drivers seeking a balance of on-road comfort and off-road capability, the X/T delivers performance where you need it most. A cut-and-chip resistant compound with a rugged 3-ply sidewall provides enhanced durability in rough conditions, while alternating open shoulders offer additional biting edges for superior traction across all terrains. Alternating step-down grooves integrated into the shoulder blocks ensure tread rigidity for improved stability on and off the road, and the optimized pitch sequence helps reduce road noise for a quieter ride. With a feature-packed design and a 40K Mile Limited Warranty, the PATAGONIA X/T sets the standard for Rugged Terrain performance.



SHOWN: FORD® BRONCO · PATAGONIA X/T · 37X12.50R17LT



MILETECH® 3-PLY SIDEWALL
Provides added strength and impact protection.



VARIABLE PITCH TREAD DESIGN
Optimized pitch sequence provides a quieter ride.

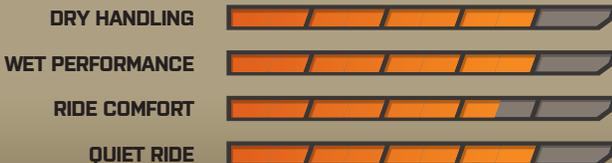


RUGGED TREAD BLOCKS
Step-down supports on the center blocks enhance off-road traction.



STONE EJECTORS
Integrated to protect against stone retention and drilling.

PERFORMANCE RATINGS[†]



Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight	UTQG
16"	LT265/75R16 (#32X10.50R16LT)	22279048	123/120Q	BW	E/10	17/32	7.50	5.50 - 7.00	10.5	31.9	3415@80	3085@80	59.5	-
	LT285/75R16 (#33X11.50R16LT)	22789023	126/123Q	BW	E/10	17/32	8.00	7.50 - 9.00	11.3	33.1	3750@80	3415@80	65.1	-
17"	§265/70R17	24689219	115T	BW	SL	17/32	8.00	7.00 - 9.00	10.7	31.7	2679@44	-	50.1	500 A B
	35X12.50R17LT	22229011	125Q	BW	E/10	19/32	10.00	8.50 - 11.00	12.5	34.8	3640@65	-	75.0	-
	37X12.50R17LT	22050503	124Q	BW	D/8	19/32	10.00	8.50 - 11.00	12.5	36.8	3525@50	-	77.4	-
	40X13.50R17LT	22235008	128Q	BW	D/8	19/32	11.00	8.50 - 11.00	13.6	39.8	3970@50	-	90.7	-
	LT255/80R17 (#33X10.00R17LT)	22275801	123/120S	BW	E/10	17/32	7.00	6.50 - 8.50	10.0	33.3	3415@80	3085@80	59.6	-
	LT265/70R17 (#32X10.50R17LT)	22810029	123/120Q	BW	E/10	17/32	8.00	7.00 - 8.50	10.7	31.9	3415@80	3085@80	61.0	-
	LT275/80R17 (#34X10.50R17LT)	22275901	121/118Q	BW	E/10	17/32	7.50	7.00 - 9.00	10.8	34.6	3195@80	2910@80	65.9	-
	LT285/70R17 (#33X11.50R17LT)	22688024	126/123Q	BW	E/10	17/32	8.50	7.50 - 9.00	11.5	33.0	3750@80	3415@80	65.4	-
LT295/70R17 (#34X12.00R17LT)	22936005	128/125Q	BW	E/10	17/32	8.50	7.50 - 10.00	11.8	33.5	3970@80	3640@80	67.0	-	
18"	§275/65R18	24531011	116T	BW	SL	17/32	8.00	7.50 - 9.50	11.0	32.1	2756@50	-	52.1	500 A B
	33X12.50R18LT	22789504	122Q	BW	F/12	17/32	10.00	8.50 - 11.00	12.5	32.8	3305@80	-	67.2	-
	35X12.50R18LT	22229254	128Q	BW	F/12	19/32	10.00	8.50 - 11.00	12.5	34.8	3970@80	-	76.0	-
	LT265/70R18 (#33X10.50R18LT)	22815008	124/121Q	BW	E/10	17/32	8.00	7.50 - 9.00	10.7	32.9	3525@80	3195@80	63.3	-
	LT275/65R18 (#32X11.00R18LT)	22772508	123/120S	BW	E/10	17/32	8.00	7.50 - 9.00	11.0	32.3	3415@80	3085@80	61.6	-
	LT275/70R18 (#33X11.00R18LT)	22797011	125/122Q	BW	E/10	19/32	8.00	7.00 - 8.50	11.0	33.4	3640@80	3305@80	67.6	-
	LT285/75R18 (#33X11.50R18LT)	22751800	129/126Q	BW	E/10	17/32	8.00	7.50 - 9.50	11.3	35.1	4080@80	3750@80	70.6	-
	LT295/70R18 (#34X12.00R18LT)	22799901	129/126R	BW	E/10	18/32	8.50	7.50 - 10.00	11.8	34.5	4080@80	3750@80	69.8	-
20"	§275/55R20	24660008	117T	BW	XL	17/32	8.50	7.50 - 9.50	11.2	31.9	2833@50	-	53.4	500 A B
	§275/60R20	24466009	116T	BW	XL	17/32	8.00	7.50 - 9.50	11.0	33.0	2756@50	-	56.2	500 A B
	33X12.50R20LT	22229102	119Q	BW	F/12	17/32	10.00	8.50 - 11.00	12.5	32.8	3000@80	-	69.7	-
	35X12.50R20LT	22229510	125Q	BW	F/12	19/32	10.00	8.50 - 11.00	12.5	34.8	3640@80	-	77.7	-
	37X12.50R20LT	22050602	128Q	BW	F/12	19/32	10.00	8.50 - 11.00	12.5	36.8	3970@80	-	81.3	-
	37X13.50R20LT	22050652	127Q	BW	E/10	19/32	11.00	9.50 - 12.00	13.6	36.8	3860@65	-	81.6	-
	38X15.50R20LT	22000085	128Q	BW	E/10	19/32	12.50	11.00 - 14.00	15.6	37.8	3970@65	-	95.4	-
	40X15.50R20LT	22000086	128Q	BW	D/8	19/32	12.50	11.00 - 14.00	15.6	39.8	3970@50	-	102.0	-
	LT265/60R20 (#33X10.50R20LT)	22152112	121/118Q	BW	E/10	17/32	7.99	8.00 - 9.50	10.7	32.8	3195@80	2910@80	62.1	-
	LT275/60R20 (#33X11.00R20LT)	22466008	123/120Q	BW	E/10	17/32	7.99	8.00 - 9.50	11.0	33.2	3415@80	3085@80	63.7	-
	LT275/65R20 (#34X11.00R20LT)	22689315	126/123Q	BW	E/10	19/32	8.00	7.50 - 9.50	11.0	34.3	3750@80	3415@80	68.2	-
	LT285/55R20 (#33X11.50R20LT)	22401509	122/119Q	BW	E/10	19/32	9.00	8.00 - 10.00	11.7	32.6	3305@80	3000@80	67.2	-
	LT295/55R20 (#33X11.50R20LT)	22235401	123/120Q	BW	E/10	17/32	9.50	8.50 - 10.50	12.2	33.0	3415@80	3085@80	66.3	-
	LT295/60R20 (#34X12.00R20LT)	22935005	126/123R	BW	E/10	17/32	8.50	8.50 - 10.50	11.8	34.2	3750@80	3415@80	68.9	-
LT295/65R20 (#35X11.50R20LT)	22438001	129/126Q	BW	E/10	17/32	8.50	8.50 - 10.50	11.8	35.4	4080@80	3750@80	72.0	-	
LT305/55R20 (#33X12.50R20LT)	22789710	125/122Q	BW	F/12	18/32	9.50	8.50 - 11.00	12.4	33.5	3640@80	3305@80	72.3	-	
22"	35X12.50R22LT	22229703	121Q	BW	F/12	19/32	10.00	8.50 - 11.00	12.5	34.8	3195@80	-	76.1	-
	37X13.50R22LT	22371303	128Q	BW	F/12	19/32	11.00	8.50 - 11.00	13.6	36.8	3970@80	-	85.9	-
	40X15.50R22LT	22000087	128Q	BW	E/10	19/32	12.50	11.00 - 14.00	15.6	39.8	3970@80	-	102.4	-

* This tire is designed for severe snow conditions and meets the DOT snow traction performance requirements.

† Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

‡ Similar flotation sizes

§ 2-ply sidewall

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



THREE-PEAK MOUNTAIN SNOWFLAKE
3PMS*-rated performance in severe snow conditions.



CUT-AND-CHIP COMPOUND
Compound formulated to withstand abuse from rocks and gravel in rough conditions.



EXTREME DURABILITY
Radial construction and 3-ply sidewall.



Q, R, S, & T RATED
Q, R, S, & T-speed rated performance.

PATAGONIA A/T PRO

• ALL-TERRAIN • LT / SUV



The **PATAGONIA A/T PRO** is an aggressive all-terrain tire engineered to conquer any terrain, in any condition, for any adventure. Built in the USA with domestic and imported materials, it carries the Three-Peak Mountain Snowflake (3PMS*) rating for severe snow, making it ideal for inclement weather and heavy winter conditions. Designed to maximize off-road grip and widen the contact patch, the A/T PRO delivers improved traction and comfort on rugged trails. Rugged, rigid tread blocks grip the terrain for sure-footed traction, while angled tread notches optimize the pitch sequence for a quieter ride. Staggered step-down grooves enhance tread rigidity, improving stability and handling while protecting the grooves from stone drilling. The Patagonia A/T PRO incorporates Milestar's MILETECH® advanced sidewall compound technology for superior strength and impact protection. Its aggressive upper sidewall shields against sharp rocks while providing additional side-biting and off-road traction. The PATAGONIA A/T PRO strikes the perfect balance between an aggressive all-weather, all-terrain tire and ultimate off-road trail performance.



SHOWN: TOYOTA TACOMA · PATAGONIA A/T PRO · LT285/70R17



- 
AGGRESSIVE UPPER SIDEWALL
 Helps protect the tire from sharp rocks and provides additional off-road traction.
- 
STAGGERED STEP-DOWN GROOVE
 Protects the grooves from stone drilling.
- 
RUGGED AND RIGID TREAD BLOCKS
 Provides rigidity which enhances vehicle stability and handling.
- 
ANGLED TREAD NOTCHES
 Optimized pitch sequence provides a quieter ride.

PERFORMANCE RATINGS[†]



Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight	UTQG
15"	215/75R15	24745011	100T	BW	SL	14/32	6.00	5.50 - 7.00	8.5	27.7	1764@47	-	30.9	660 A A
	235/75R15	24760021	109T	BW	XL	14/32	6.50	6.00 - 8.00	9.3	28.9	2271@51	-	34.2	660 A A
	30X9.50R15LT	22280012	104S	BW	C/6	18/32	7.50	6.00 - 8.00	9.5	29.5	1985@50	-	43.0	-
	31X10.50R15LT	22285036	109S	BW	C/6	18/32	8.50	7.00 - 9.00	10.6	30.5	2270@50	-	46.3	-
16"	245/75R16	24768011	115T	BW	XL	14/32	7.00	6.50 - 8.00	9.8	30.5	2679@51	-	38.6	660 A A
	265/70R16	24272018	112T	BW	SL	14/32	8.00	7.00 - 9.00	10.7	30.6	2469@47	-	40.8	660 A A
	265/75R16	24773012	116T	BW	SL	14/32	7.50	7.00 - 9.00	10.5	31.7	2756@47	-	44.1	660 A A
	LT225/75R16	22756008	115/112S	BW	E/10	18/32	6.00	6.00 - 7.50	8.8	29.3	2680@80	2470@80	39.7	-
	LT235/85R16	22270056	120/116S	BW	E/10	18/32	6.50	6.00 - 7.50	9.3	31.7	3042@80	2778@80	44.1	-
	LT245/75R16	22275057	120/116S	BW	E/10	18/32	7.00	6.50 - 8.00	9.8	30.5	3042@80	2778@80	44.1	-
	LT265/75R16	22279054	123/120S	BW	E/10	18/32	7.50	7.00 - 9.50	10.5	31.7	3415@80	3085@80	48.5	-
	LT285/75R16	22789027	126/123R	BW	E/10	18/32	8.00	7.50 - 9.50	11.3	32.8	3750@80	3415@80	51.8	-
	LT305/70R16	22800008	124/121R	BW	E/10	18/32	9.00	8.00 - 10.00	12.2	32.8	3525@65	3195@65	54.0	-
LT315/75R16	22790010	127/124R	BW	E/10	18/32	8.50	8.00 - 10.50	12.3	34.6	3860@65	3525@65	55.1	-	
17"	235/75R17	22021001	109T	BW	SL	14/32	6.50	6.00 - 8.00	9.3	30.9	2271@47	-	37.5	660 A A
	245/65R17	24552521	111T	BW	XL	14/32	7.00	7.00 - 8.50	9.8	29.5	2403@51	-	37.5	660 A A
	245/70R17	24552614	114T	BW	XL	14/32	7.00	6.50 - 8.00	9.8	30.6	2601@51	-	38.6	660 A A
	255/65R17	24626006	114T	BW	XL	14/32	8.00	7.00 - 9.00	10.2	30.1	2601@51	-	39.7	660 A A
	255/70R17	24629011	112T	BW	SL	14/32	7.50	6.50 - 8.50	10.2	31.1	2469@47	-	39.7	660 A A
	265/65R17	24689017	116T	BW	XL	14/32	8.00	7.50 - 9.50	10.7	30.6	2756@51	-	41.9	660 A A
	265/70R17	24689220	115T	BW	SL	14/32	8.00	7.00 - 9.00	10.7	31.7	2679@47	-	43.0	660 A A
	285/70R17	24695004	116T	BW	SL	14/32	8.50	7.50 - 9.50	11.5	32.8	2756@47	-	45.2	660 A A
	35X12.50R17LT	22229009	125R	BW	E/10	18/32	10.00	8.50 - 11.00	12.5	34.5	3195@65	-	60.6	-
	LT235/80R17	22275613	120/117R	BW	E/10	18/32	6.50	6.00 - 8.00	9.3	31.8	3085@80	2835@80	45.2	-
	LT245/70R17	22269017	119/116S	BW	E/10	18/32	7.00	6.50 - 8.00	9.8	30.6	3000@80	2755@80	45.2	-
	LT245/75R17	22275516	121/118S	BW	E/10	18/32	7.00	6.50 - 8.00	9.8	31.5	3195@80	2910@80	47.4	-
	LT245/75R17	22000101	121/118S	BW	E/10	18/32	7.00	6.50 - 8.00	9.8	31.5	3195@80	2910@80	47.4	-
	LT265/70R17	22000099	121/118S	BW	E/10	18/32	8.00	7.00 - 9.00	10.7	31.7	3195@80	2910@80	49.6	-
	LT275/70R17	22139002	121/118S	BW	E/10	18/32	8.00	7.00 - 9.00	11.0	32.2	3195@80	2910@80	49.6	-
	LT285/70R17	22000100	121/118S	BW	E/10	18/32	8.50	7.00 - 9.50	11.5	32.8	3195@80	2910@80	51.8	-
	LT285/70R17	22688020	121/118S	BW	E/10	18/32	8.50	7.00 - 9.50	11.5	32.8	3195@80	2910@80	51.8	-
LT285/75R17	22751803	121/118S	BW	E/10	18/32	8.00	7.50 - 9.50	11.3	33.9	3195@80	2910@80	51.8	-	
LT315/70R17	22000105	121/118S	BW	E/10	18/32	9.50	8.00 - 10.50	12.7	34.4	3195@65	2910@65	59.5	-	
18"	255/65R18	24995108	109H	BW	XL	14/32	8.00	7.00 - 9.00	10.4	29.0	2271@47	-	37.5	660 A A
	255/70R18	24499003	113T	BW	SL	14/32	7.50	6.50 - 8.50	10.2	32.1	2535@51	-	41.9	660 A A
	265/60R18	24583310	114T	BW	XL	14/32	8.00	7.50 - 9.50	10.7	30.5	2601@51	-	41.9	660 A A
	265/65R18	24651007	114T	BW	SL	14/32	8.00	7.50 - 9.00	10.7	31.5	2601@47	-	40.8	660 A A
	265/70R18	24890008	116T	BW	SL	14/32	8.00	7.00 - 9.00	10.7	32.6	2756@47	-	43.0	660 A A
	275/65R18	24531012	116T	BW	SL	14/32	8.00	7.50 - 9.50	10.9	32.1	2756@47	-	45.2	660 A A
	35X12.50R18LT	22000109	128R	BW	F/12	18/32	10.00	8.50 - 11.00	12.5	34.5	3970@80	-	61.7	-
	LT265/70R18	22000108	124/121S	BW	E/10	18/32	8.00	7.00 - 9.00	10.7	32.6	3525@80	3195@80	52.9	-
	LT265/70R18	22815009	124/121S	BW	E/10	18/32	8.00	7.00 - 9.00	10.7	32.6	3525@80	3195@80	52.9	-
	LT275/65R18	22000104	123/120S	BW	E/10	18/32	8.00	8.00 - 9.50	11.0	32.1	3415@80	3085@80	52.9	-
	LT275/65R18	22772512	123/120S	BW	E/10	18/32	8.00	8.00 - 9.50	11.0	32.1	3415@80	3085@80	52.9	-
	LT275/70R18	22000103	125/122S	BW	E/10	18/32	8.00	7.00 - 9.00	10.9	33.1	3640@80	3305@80	54.0	-
	LT285/65R18	22799003	125/122S	BW	E/10	18/32	8.50	8.50 - 10.00	11.5	32.6	3640@80	3305@80	54.0	-
	LT285/75R18	22752001	129/126S	BW	E/10	18/32	8.00	7.50 - 9.50	11.3	34.8	4080@80	3750@80	54.0	-
LT295/70R18	22799902	129/126S	BW	E/10	18/32	8.50	7.50 - 10.00	11.8	34.3	4080@80	3750@80	58.4	-	
LT305/65R18	22799403	128/125R	BW	F/12	18/32	9.00	9.00 - 11.00	12.2	33.6	3970@80	3640@80	58.4	-	
20"	265/60R20	24652009	111T	BW	XL	14/32	8.50	7.50 - 9.50	10.9	30.5	2403@51	-	40.8	660 A A
	275/55R20	24660009	117T	BW	XL	14/32	8.50	7.50 - 9.50	11.2	31.9	2833@51	-	45.2	660 A A
	275/60R20	24466010	115T	BW	SL	14/32	8.00	7.00 - 9.50	11.0	33.0	2679@47	-	46.3	660 A A
	35X12.50R20LT	22229511	125R	BW	F/12	18/32	10.00	8.50 - 11.00	12.5	34.5	3640@80	-	61.7	-
	LT265/60R20	22152113	121/118S	BW	E/10	18/32	8.00	8.00 - 9.50	10.7	32.5	3195@80	2910@80	52.9	-
	LT275/55R20	22401301	120/117S	BW	E/10	18/32	8.50	8.00 - 9.50	11.2	31.9	3086@80	2835@80	49.6	-
	LT275/60R20	22000106	123/120S	BW	E/10	18/32	8.00	8.00 - 9.50	11.0	33.0	3415@80	3085@80	55.1	-
	LT275/65R20	22000102	126/123S	BW	E/10	18/32	8.00	8.00 - 9.50	11.0	34.1	3748@80	3415@80	57.3	-
	LT285/55R20	22401512	122/119T	BW	E/10	18/32	8.00	8.50 - 10.00	11.7	32.4	3305@80	3000@80	54.0	-
	LT285/60R20	22000107	125/122R	BW	E/10	18/32	8.50	8.50 - 10.00	11.5	33.5	3640@80	3305@80	55.1	-
	LT285/65R20	22689401	127/124S	BW	E/10	18/32	8.50	8.50 - 10.00	11.5	34.6	3860@80	3525@80	47.4	-
22"	285/45R22	24459903	114H	BW	XL	14/32	9.50	9.00 - 10.50	11.2	32.1	2601@51	-	44.1	660 A A
	33X12.50R22LT	22229706	109R	BW	E/10	18/32	10.00	8.50 - 11.00	12.5	32.5	2270@65	-	49.6	-
	35X12.50R22LT	22229705	121Q	BW	F/12	18/32	10.00	8.50 - 11.00	12.5	34.5	3195@80	-	62.8	-

* This tire is designed for severe snow conditions and meets the DOT snow traction performance requirements.

† Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

‡ With domestic and imported materials.

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



MILETECH® ADVANCED COMPOUND TECHNOLOGY
Provides added strength, impact protection, and enhanced sidewall engineered for the toughest terrains.



THREE-PEAK MOUNTAIN SNOWFLAKE
3PMS*-rated performance in severe snow conditions.



EXTREME TERRAIN
Aggressive design and large voids to effectively navigate rough conditions.



H, Q, R, S, & T RATED
H, Q, R, S, & T-speed rated performance.

PATAGONIA A/T R

• ALL-TERRAIN • LT / SUV



Designed to balance on-road mannerisms with off-road toughness, the **PATAGONIA A/T R** offers the best of both worlds. Rugged and durable, it incorporates a new tread pattern ready to conquer any condition and all terrains. The tread design promotes superior traction on and off the road and during inclement conditions. Offset tread blocks, with an alternating open shoulder design, adds biting edges for superior all-weather traction. Staggered step-down grooves provide tread rigidity that enhances driving stability and protects the tire from stone drilling, with an advanced cut-and-chip resistant silica-infused tread compound for maximum grip and longer tread life. M+S rated, available in popular high-flotation aftermarket sizes, and carrying a 50K Mile Limited Warranty, the **PATAGONIA A/T R** is ready to kick-start your adventure.



SHOWN: SUBARU® CROSSTREK - PATAGONIA A/T R - 235/75R15



-  **OFFSET TREAD BLOCKS**
Adds biting edges for superior all-weather traction for both on and off-road environments.
-  **STAGGERED STEP-DOWN GROOVE**
Provides tread rigidity, enhancing stability and handling while protecting the groove from stone drilling.
-  **VARIABLE DEPTH SIPING**
Designed to provide performance consistency throughout the life of the tire.
-  **ANGLED TREAD NOTCHES**
Provides increased void and surface area for superior mud and winter traction.

PERFORMANCE RATINGS*



Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight	UTQG
15"	31X10.50R15LT	22285028	109Q	BW	C/6	16/32	8.50	7.00 - 9.00	10.6	30.5	2270@50		46.3	-
	LT235/75R15	22870004	104/101Q	BW	C/6	14/32	8.50	6.00 - 7.00	9.3	28.9	1985@50	1820@50	39.2	-
16"	265/70R16	24272016	112T	BW	SL	13/32	8.00	7.00 - 8.50	10.7	30.6	2469@44		41.6	540 A B
	265/75R16	24773010	116T	BW	SL	13/32	7.50	7.00 - 8.00	10.5	31.7	2756@44		43.0	540 A B
	LT215/85R16	22860026	115/112Q	BW	E/10	14/32	6.00	5.50 - 7.00	8.5	30.4	2680@80	2470@80	42.8	-
	LT225/75R16	22756007	115/112Q	BW	E/10	14/32	6.00	6.00 - 7.00	8.8	29.3	2680@80	2470@80	42.5	-
	LT235/85R16	22270049	120/116Q	BW	E/10	16/32	6.50	6.00 - 7.50	9.3	31.7	3042@80	2778@80	49.1	-
	LT245/75R16	22275051	120/116Q	BW	E/10	16/32	7.00	6.50 - 8.00	9.8	30.5	3042@80	2778@80	48.6	-
	LT265/75R16	22279045	123/120Q	BW	E/10	16/32	7.50	7.00 - 8.00	10.5	31.7	3415@80	3085@80	51.6	-
17"	LT285/75R16	22789017	126/123Q	BW	E/10	16/32	8.00	7.50 - 9.00	11.3	32.8	3750@80	3415@80	58.7	-
	245/65R17	24552518	107T	BW	SL	13/32	7.00	7.00 - 8.00	9.8	29.5	2149@44		38.0	540 A B
	245/70R17	22689103	114T	BW	XL	13/32	7.00	6.50 - 8.00	9.8	30.6	2601@51		39.0	540 A A
	265/65R17	24689014	112T	BW	SL	13/32	8.00	7.50 - 9.50	10.7	30.6	2469@44		41.5	540 A B
	265/70R17	22810015	115T	BW	SL	13/32	8.00	7.00 - 8.50	10.7	31.7	2679@44		43.6	540 A A
	285/70R17	24695003	117T	BW	SL	13/32	8.50	7.50 - 9.00	11.5	32.8	2833@44		47.2	540 A B
	LT235/80R17	22275610	120/117Q	BW	E/10	16/32	6.50	6.00 - 7.50	9.3	31.8	3085@80	2835@80	49.4	-
	LT245/70R17	22269013	119/116Q	BW	E/10	16/32	7.00	6.50 - 8.00	9.8	30.6	3000@80	2755@80	48.4	-
	LT245/75R17	22275512	121/118Q	BW	E/10	16/32	7.00	6.50 - 7.50	9.8	31.5	3195@80	2910@80	48.3	-
	LT265/70R17	22810020	123/120S	BW	E/10	16/32	8.00	7.00 - 8.50	10.7	31.7	3415@80	3085@80	53.3	-
	LT275/70R17	22139003	124/121R	BW	E/10	16/32	8.00	7.00 - 8.50	10.9	32.2	3525@80	3195@80	56.6	-
18"	LT285/70R17	22688025	126/123Q	BW	E/10	16/32	8.50	7.50 - 9.00	11.5	32.8	3750@80	3415@80	59.7	-
	LT315/70R17	22801009	126/123Q	BW	E/10	16/32	9.50	8.00 - 11.00	12.7	34.4	3750@65	3415@65	65.2	-
	265/60R18	24583306	114T	BW	XL	13/32	8.00	7.50 - 9.50	10.7	30.5	2601@51		41.9	540 A B
	265/65R18	24651004	114T	BW	SL	13/32	8.00	7.50 - 9.50	10.7	31.5	2601@44		43.7	540 A B
	275/65R18	22772504	116T	BW	SL	12/32	8.00	7.50 - 9.00	11.0	32.1	2756@44		42.9	540 A A
	35X12.50R18LT	22229251	123Q	BW	E/10	16/32	10.00	8.50 - 11.00	12.5	34.5	3415@65		62.9	-
	LT275/65R18	22772506	123/120S	BW	E/10	16/32	8.00	7.50 - 9.00	11.0	32.1	3415@80	3085@80	54.5	-
20"	LT275/70R18	22797006	125/122S	BW	E/10	16/32	8.00	7.00 - 9.00	11.0	33.2	3640@80	3305@80	56.1	-
	LT285/65R18	22402001	125/122S	BW	E/10	16/32	8.50	8.00 - 10.00	11.5	32.6	3640@80	3305@80	59.7	-
	33X12.50R20LT	22229100	114Q	BW	E/10	16/32	10.00	8.50 - 11.00	12.5	32.5	2600@65		62.3	-
	35X12.50R20LT	22229502	121Q	BW	E/10	16/32	10.00	8.50 - 11.00	12.5	34.5	3195@65		65.3	-
	LT265/60R20	22152110	121/118R	BW	E/10	16/32	8.00	7.50 - 9.50	10.7	32.5	3195@80	2910@80	58.1	-
	LT275/65R20	22689310	126/123Q	BW	E/10	16/32	8.00	7.50 - 9.50	11.0	34.1	3750@80	3415@80	58.1	-
20"	LT285/65R20	22401506	122/119R	BW	E/10	16/32	9.00	8.00 - 10.00	11.7	32.4	3305@80	3000@80	60.8	-
	LT305/55R20	22789705	121/118S	BW	E/10	16/32	9.50	8.50 - 11.00	12.4	33.2	3195@65	2910@65	64.6	-

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation. Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



CUT-AND-CHIP COMPOUND
Compound formulated to withstand abuse from rocks and gravel in rough conditions.



ALL-SEASON
Pattern design and tread compound enhanced for seasonal conditions.



WET TRACTION
Elaborate siping and enhanced tread design allows for superior water dispersion.



EXTREME TERRAIN
Aggressive design and large voids to effectively navigate rough conditions.

PATAGONIA H/T

• ALL-SEASON HIGHWAY • LT / SUV



The **PATAGONIA H/T** is the versatile workhorse of the Milestar family, meeting the demand from today's full-size pick-up trucks and SUVs for a dependable, low-maintenance tire. The all-season highway tread design utilizes circumferential ribbing and notching tread blocks that provide a smooth and quiet ride with enhanced wet traction. The all-season tread design includes optimized angled grooves and directional siping for improved inclement-weather handling and stability. Backed by a 60K Mile Limited Warranty, the PATAGONIA H/T is ready for your long haul or any level of duty.



SHOWN: FORD® F150 - PATAGONIA H/T - P275/55R20



-  **ANGLED TREAD NOTCHES**
Enhances traction while also reducing noise and improving overall tread life.
-  **WIDE CIRCUMFERENTIAL RIBS**
Improves stability, handling, and lateral grip.
-  **LATERAL SIPING**
Consistent traction in inclement weather.
-  **STONE EJECTORS**
Integrated to protect against stone retention and drilling.

PERFORMANCE RATINGS*



Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width (Measured)	Rim Width (Approved)	Section Width	Overall Diameter	Max Load (Single)	Max Load (Dual)	Approximate Weight	UTQG
15"	P225/75R15	24000042	102T	BW	SL	11/32	6.00	6.00 - 7.50	8.8	28.3	1874@44	-	29.1	540 A B
	P235/75R15	24760023	108T	BW	XL	11/32	6.50	6.00 - 8.00	9.3	28.9	2183@50	-	30.8	540 A B
	LT235/75R15	22270510	104/101Q	BW	C/6	11/32	6.50	6.00 - 8.00	9.3	28.9	1985@50	1820@50	31.1	-
16"	P215/70R16	24156010	99T	BW	SL	11/32	6.50	6.50 - 7.00	8.7	27.9	1709@44	-	27.4	540 A B
	P225/70R16	24260007	101T	BW	SL	11/32	6.50	6.00 - 7.00	9.0	28.4	1819@44	-	28.8	540 A B
	P235/70R16	24265023	104T	BW	SL	11/32	7.00	6.00 - 8.00	9.4	29.0	1984@44	-	30.8	540 A B
	P245/70R16	24268015	106T	BW	SL	12/32	7.00	6.50 - 8.00	9.8	29.5	2094@44	-	33.4	540 A B
	P245/75R16	24768010	109T	BW	SL	12/32	7.00	6.50 - 8.00	9.8	30.5	2271@44	-	34.3	540 A B
	P255/70R16	24270014	109T	BW	SL	12/32	7.50	6.50 - 8.50	10.2	30.1	2271@44	-	35.7	540 A B
	P265/70R16	24272020	111T	BW	SL	12/32	8.00	7.00 - 9.00	10.7	30.6	2403@44	-	37.5	540 A B
	P265/75R16	24773011	114T	BW	SL	12/32	7.50	7.00 - 8.00	10.5	31.7	2601@44	-	39.2	540 A B
	LT215/85R16	22860029	115/112Q	BW	E/10	11/32	6.00	5.50 - 7.00	8.5	30.4	2680@80	2470@80	38.1	-
	LT225/75R16	22265027	115/112Q	BW	E/10	12/32	6.00	6.00 - 7.00	8.8	29.3	2680@80	2470@80	37.7	-
	LT235/85R16	22270051	120/116Q	BW	E/10	13/32	6.50	6.00 - 7.50	9.3	31.7	3042@80	2778@80	43.6	-
	LT245/75R16	22275053	120/116Q	BW	E/10	13/32	7.00	6.50 - 8.00	9.8	30.5	3042@80	2778@80	42.7	-
	LT265/75R16	22279047	123/120Q	BW	E/10	13/32	7.50	7.00 - 8.00	10.5	31.7	3415@80	3085@80	46.4	-
	LT285/75R16	22789021	126/123Q	BW	E/10	13/32	8.00	7.50 - 9.00	11.3	32.8	3750@80	3415@80	52.0	-
	17"	P225/65R17	24557016	100T	BW	SL	11/32	6.50	6.00 - 8.00	9.0	28.5	1764@44	-	29.3
P235/65R17		24657015	103T	BW	SL	11/32	7.00	6.50 - 8.50	9.4	29.1	1929@44	-	31.2	540 A B
P245/65R17		24552525	105T	BW	SL	12/32	7.00	7.00 - 8.50	9.8	29.5	2039@44	-	33.5	540 A B
P245/70R17		24552616	108T	BW	SL	12/32	7.00	6.50 - 8.00	9.8	30.6	2205@44	-	35.1	540 A B
P265/65R17		24689015	110T	BW	SL	12/32	8.00	7.50 - 9.50	10.7	30.6	2337@44	-	36.2	540 A B
P265/70R17		24689222	113T	BW	SL	12/32	8.00	7.00 - 9.00	10.7	31.7	2535@44	-	39.2	540 A B
LT235/80R17		22275611	120/117Q	BW	E/10	14/32	6.50	6.00 - 7.50	9.3	31.8	3085@80	2835@80	44.5	-
LT245/70R17		22269016	119/116Q	BW	E/10	14/32	7.00	6.50 - 8.00	9.8	30.6	3000@80	2755@80	43.7	-
LT245/75R17		22275513	121/118Q	BW	E/10	14/32	7.00	6.50 - 7.50	9.8	31.5	3195@80	2910@80	45.5	-
18"	LT265/70R17	22810025	123/120Q	BW	E/10	15/32	8.00	7.00 - 8.50	10.7	31.7	3415@80	3085@80	50.5	-
	P255/65R18	24000041	109T	BW	SL	11/32	7.50	7.00 - 9.00	10.2	31.1	2271@44	-	35.3	540 A B
	P265/60R18	24583308	109T	BW	SL	11/32	8.00	7.50 - 9.50	10.7	30.5	2271@44	-	36.4	540 A B
	P265/65R18	24651005	112T	BW	SL	11/32	8.00	7.50 - 9.50	10.7	31.5	2469@44	-	37.5	540 A B
	P265/70R18	24890007	114T	BW	SL	12/32	8.00	7.00 - 9.00	10.7	32.6	2601@44	-	40.1	540 A B
	P275/65R18	24531009	114T	BW	SL	12/32	8.00	7.50 - 9.00	11.0	32.1	2601@44	-	39.7	540 A B
	LT265/70R18	22815006	124/121Q	BW	E/10	15/32	8.00	7.00 - 9.00	10.7	32.6	3525@80	3195@80	52.8	-
20"	P275/55R20	24660007	111T	BW	SL	12/32	8.50	7.50 - 9.50	11.2	31.9	2403@44	-	40.2	540 A B
	P275/60R20	24466008	114T	BW	SL	12/32	8.00	7.50 - 9.50	11.0	33.0	2601@44	-	42.2	540 A B
	LT275/65R20	22689312	126/123Q	BW	E/10	15/32	8.00	7.50 - 9.50	11.0	34.1	3750@80	3415@80	58.5	-
22"	P275/50R22	24000314	115H	BW	XL	10/32	8.50	7.50 - 9.50	11.2	32.9	2679@50	-	41.7	540 A B
	P285/45R22	24459904	114T	BW	XL	10/32	9.50	9.00 - 10.50	11.2	32.1	2601@50	-	40.5	540 A B

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation. Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



ALL-SEASON
Pattern design and tread compound enhanced for seasonal conditions.



FITMENTS
Designed for a variety of today's vehicles, including light truck and SUV applications.



DRY TRACTION
Performance-enhanced tread design for improved handling in dry conditions.



WET TRACTION
Elaborate siping and enhanced tread design allows for superior water dispersion.

COMMERCIAL LT / VAN TIRE PRODUCT LINEUP

SHOWN: FORD® TRANSIT VAN - STEELPRO MS597S - 215/55R16



STEELPRO MS597

PROFESSIONAL SERIES
HEAVY DUTY LIGHT TRUCK

STEELPRO MS597S

PROFESSIONAL SERIES
COMMERCIAL VAN / SPRINTER

STEELPRO AST

PROFESSIONAL SERIES
ALL-STEEL TRAILER

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



STEELPRO MS597

• PROFESSIONAL SERIES • HEAVY DUTY LIGHT TRUCK



The **STEELPRO MS597** represents all-encompassing durability at its finest. The steel-belted STEELPRO MS597 is formulated using superior compounds and advanced load-carrying designs in order to endure miles of heavy-duty driving. Circumferential traction ribs and stiff solid shoulders with gripping edges deliver incomparable traction and biting grip. Strong sidewalls ensure a higher maximum load capacity while also combating wear damage.



SHOWN: MERCEDES BENZ® SPRINTER 2500 STEELPRO MS597 - LT245/75R16



3-PLY SIDEWALL
Provides added strength and impact protection.



DURABLE RIBBED SHOULDER DESIGN
Provides greater stability and reduces irregular wear.



DEEP ZIGZAG GROOVES
Promotes rapid water evacuation and improves traction and stability even under heavy loads.



STONE EJECTORS
Integrated to protect against stone retention and drilling.

PERFORMANCE RATINGS*





Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width [Measured]	Rim Width [Approved]	Section Width	Overall Diameter	Max Load [Single]	Max Load [Dual]	Approximate Weight
16"	LT215/85R16	22860030	115/112Q	BW	E/10	12/32	6.00	5.50 - 7.00	8.5	30.4	2679@80	2469@80	36.2
	LT225/75R16	22265030	115/112Q	BW	E/10	12/32	6.00	6.00 - 7.00	8.8	29.3	2679@80	2469@80	34.7
	LT235/85R16	22270055	120/116Q	BW	E/10	13/32	6.50	6.00 - 7.50	9.3	31.7	3042@80	2778@80	40.0
	LT245/75R16	22275056	120/116Q	BW	E/10	13/32	7.00	6.50 - 8.00	9.8	30.5	3042@80	2778@80	39.6
16.5"	LT265/75R16	22279053	123/120Q	BW	E/10	13/32	7.50	7.00 - 8.00	10.5	31.7	3417@80	3086@80	42.9
	8.75R16.5LT	22072006	115/111R	BW	E/10	13/32	6.75	6.60 - 8.00	9.5	30.6	2679@80	2403@80	40.6
	9.50R16.5LT	22065006	121/117R	BW	E/10	13/32	6.75	6.80 - 8.30	8.8	29.5	3197@80	2833@80	44.8

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation. Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



ALL-SEASON
 Pattern design and tread compound enhanced for seasonal conditions.



PROFESSIONAL SERIES
 Engineered for heavy load use specific to commercial applications.

STEELPRO MS597S

• PROFESSIONAL SERIES • COMMERCIAL VAN / SPRINTER



The **STEELPRO MS597S** meets the growing demands of the commercial van segment. The MS597S is engineered with an enhanced 2-ply sidewall construction built with extra load fitments, as well as load ranges D and E to support greater demands for commercial applications. The tread pattern integrates an aggressive highway rib design, delivering long-lasting treadwear, while the stone ejectors within the grooves protect against stone retention and drilling. The MS597S has a comfortable and quiet design, performs great in wet-weather conditions, and comes with a 40K Mile Limited Warranty. The MS597S is ready for most commercial applications, professional fleet, and contractor duties.



SHOWN: FORD® TRANSIT VAN - STEEL PRO MS597S - 215/55R16



AGGRESSIVE HIGHWAY RIB AND TREAD
Optimizes heavy-load traction and handling for commercial and professional use.



HEAVY DUTY
C* designation designed for higher PSI, heavier loads, and commercial use.



SIPING
Added siping for enhanced grip due to lighter commercial loads and scrubbing.



STONE EJECTORS
Integrated to protect against stone retention and drilling.

PERFORMANCE RATINGS⁺





Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width [Measured]	Rim Width [Approved]	Section Width	Overall Diameter	Max Load [Single]	Max Load [Dual]	Approximate Weight
15"	185/60R15C*	23616001	94/92S	BW	C/6	12/32	5.50	5.00 - 6.50	7.4	23.7	1477@54	1389@54	21.3
	205/65R15C*	23540001	102/100S	BW	C/6	13/32	6.00	5.50 - 7.50	8.2	25.5	1874@54	1764@54	24.5
16"	195/75R16C*	23112001	107/105R	BW	D/8	13/32	5.50	5.00 - 6.00	7.7	27.5	2150@69	2039@69	28.3
	235/65R16C*	23676001	121/119R	BW	E/10	13/32	7.00	6.50 - 8.50	9.4	28.0	3197@83	2998@83	36.3

* C denotes Commercial, not Ply Rating.

† Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation.

Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



ALL-SEASON
Pattern design and tread compound enhanced for seasonal conditions.



PROFESSIONAL SERIES
Engineered for heavy load use specific to commercial applications.

STEELPRO AST

• PROFESSIONAL SERIES • ALL-STEEL TRAILER

Designed to provide long-lasting, reliable performance and exceptional durability, the **STEELPRO AST** has the ability to take on a variety of demanding applications. The **STEELPRO AST** boasts maximum strength and durability thanks to an all-steel casing that is made to withstand road abuse. Four circumferential grooves with stone ejectors evacuate water, dirt, and rocks to enhance traction in all conditions. With the support of a solid center circumferential rib, the **STEELPRO AST** also maintains stability and responsive handling at highway speeds. If you're looking for a tire that can withstand the challenges of hauling, the **STEELPRO AST** is the perfect choice.



SHOWN: PACE® AUTO HAULER · STEELPRO AST · ST235/85R16



- SOLID CENTER CIRCUMFERENTIAL RIB**
Enhances lateral stability and improves handling.
- ALL-STEEL COMMERCIAL CASING**
Resists cuts and scrapes to provide maximum strength and durability.
- WIDE CIRCUMFERENTIAL GROOVES**
Aids in the evacuation of water to reduce hydroplaning.
- STONE EJECTORS**
Integrated to protect against stone retention and drilling.

PERFORMANCE RATINGS*





Wheel Diameter	Size	Item Number	Service Index	Sidewall	LR/PR	Tread Depth	Rim Width [Measured]	Rim Width [Approved]	Section Width	Overall Diameter	Max Load [Single]	Max Load [Dual]	Approximate Weight
15"	ST225/75R15	29900017	123/119M	BW	G/14	12/32	6.00	6.00 - 7.50	8.7	28.3	3420@110	3000@110	46.0
	ST235/80R16	29900016	129/125M	BW	G/14	12/32	6.50	6.00 - 8.00	9.2	30.9	4080@110	3640@110	54.7
16"	ST235/85R16	29900015	132/127L	BW	G/14	12/32	6.50	6.00 - 7.50	9.3	31.9	4400@110	3860@110	55.1

* Performance Ratings are based on a scale of 1 to 5 with 5 being best. Ratings are compared between other Milestar tires within the same segment. Milestar Tires reserves the right to change tire construction, design, tread compound, and specifications without notice or obligation. Product images shown are for illustrative purposes only. Technical features, tread pattern design, and tire construction subject to change without notice and can vary by size and application.



DURABILITY
All-steel casing made to withstand road abuse.



TRAILER SERVICE
Designed for a variety of commercial and towing applications.



PROFESSIONAL SERIES
Engineered for heavy load use specific to commercial applications.

STANDARD LIMITED WARRANTY

Every tire and wheel supplied by Tireco is warranted to be free from defects in materials and workmanship subject to the terms, conditions, and limitations as stated below. If our examination of a warrantable product determines that the product has failed due to a defect in materials or workmanship, we will make a reasonable allowance toward the purchase of a new product at current prices or other adjustment within our discretion. Adjustments will be made on a pro-rata basis determined by the amount of usage or service received by the product and will be based on the most recent purchase price by an authorized Tireco dealer [proof of purchase is required].

TERMS, CONDITIONS, AND LIMITATIONS

Any product, no matter how well constructed, may fail in service or become unserviceable due to conditions beyond the control of the manufacturer. Under no circumstance is this Standard Limited Warranty a representation that a tire, tube, or wheel failure cannot occur.

WHAT IS COVERED:

This Standard Limited Warranty is only applicable to products sold in and used on vehicles registered & operated in the United States, U.S. Territories, Canada, and Mexico. In addition, this Standard Limited Warranty is applicable only to the original purchaser of the product, and is not transferable. The costs of mounting, balancing, and other associated services as well as any applicable Federal, State or Local taxes are not covered by this Standard Limited Warranty.

WHAT IS NOT COVERED:

This Standard Limited Warranty does not cover and Tireco will not adjust any of our products against road hazards (unless the product is specifically included in our Road Hazard program and subject to the Road Hazard Limited Warranty terms and conditions), including, but not limited to: cuts, punctures (whether repairable or not), snags, bruises, tears, impact breaks, etc. Products are also not warranted if damaged due to misuse, including, but not limited to, improper installation or mounting, misapplication, improper repair, overloading, improper inflation, excessive speed, racing, spinning, drifting, unintended off-road use, stone drilling, improper use of chains, use of non-approved or non-standard rims (as determined by the Tire and Rim Association), continued operation while severely under-inflated, misalignment or imbalance of wheels/rims, defective brakes or shock absorbers, abuse, accident or collision, willful damage, oil or chemical action, improper storage, fire or other excessive heat, vandalism, and water or other material entrapped inside the product.

SPECIFIC TIRE LIMITATIONS AND EXCLUSIONS

- Tire adjustments will be based on the remaining tread depth. Tires worn to 2/32" tread depth or to the treadwear indicator bars are deemed to have served their full useful tread life and are not adjustable for any reason.
- Tires returned for out-of-round or ride disturbance conditions within the first 2/32" of treadwear will be credited for 100% of their value based on the average purchase price by an authorized Tireco dealer for the last six months. Tires returned for out of round beyond the first 2/32 of wear will not be considered for adjustment. Off-road, Agriculture, and Trailer tires are not eligible for out-of-round or ride disturbance consideration.
- Tires that have been marked or branded to note special classifications such as "B" (appearance blemish) may not be considered for adjustment at Tireco's sole discretion.
- Tires that have been marked or branded with an "NA" (nonadjustable) are specifically excluded from this Standard Limited Warranty.
- For tires designed for and used on all classes of recreational vehicles, equipment trailers, horse trailers, cargo trailers and all other trailers; Tireco may require a certified weight ticket for any warranty consideration. Specialty Trailer (ST size designation tires) are specifically limited to a warranty of five (5) years from date of manufacture and any allowance made will be based on our Manufacturer's Suggested Retail Price (MSRP)
- Loss of time, or use, inconvenience, or any incidental or consequential damage are not covered by this warranty, subject to applicable state law.
- Tires which have been retreaded (other than those specifically mentioned in our Limited Casing Warranty) or altered in any way are not warranted.
- Tires that do not have a Department of Transportation (DOT) number; tires that fail due to the addition of aftermarket materials (tire fill, sealant, balancer, etc.); tires that have been modified by notching, buffing or cutting; tires returned for weather/ozone cracking after two (2) years from date of purchase; tires with production dates six (6) years and older.

SPECIFIC WHEEL LIMITATIONS AND EXCLUSIONS

- Cosmetic defects caused by weathering as well as used, reconditioned or blemished wheels are specifically excluded from this Standard Limited Warranty.
- Chrome plating and clear coat finishes are warranted against peeling, cracking, and other cosmetic flaws for a period of one (1) year from date of purchase.
- New wheels returned without all of the original packaging material in good condition including the original box will be charged a 15% restocking fee.

HOW TO FILE A CLAIM:

Each step of the following procedures must be completed in order to qualify for any credit provided by this Standard Limited Warranty:

1. The dealer must contact the Tireco Consumer Relations Department to receive a Return Merchandise Number (RMA) to start the warranty claim process.
 - a. rma@tireco.com
 - b. 1-800-937-9433
2. The Tireco authorized dealer must use the Warranty Claim Form provided by Tireco for any adjustments to be considered for credit. The Claim Form must be filled in completely (Tire size, Tread pattern, DOT, Remaining tread, etc.) for each tire being returned.
3. The Consumer Relations Representative will request tire(s) to be sent to one of Tireco's Adjustment Centers at our expense for inspection. Shipping instructions along with an RMA number will be provided.
4. The dealer must send the completed Claim Form and all other documents to the Adjustment Center.
5. Upon receipt of documents and tires, the appropriate Tireco Representative will complete the inspection.
6. If the tire(s) is deemed adjustable, the authorized Tireco dealer will be notified and will be issued a credit after which the tire will be destroyed by Tireco.
7. If the tire(s) is not adjustable and does not meet the limited Standard Warranty requirements, the authorized Tireco dealer will receive a letter of notification with an explanation. If the tire(s) was requested by the dealer to be returned, the non-adjustable tire(s) will be returned at the expense of the dealer. Any tire that the dealer leaves with Tireco will be destroyed without further notice.
8. No credit shall be given until a completed warranty claim form and all documents related to the claim are received by Tireco and the tire is found to be adjustable.
9. Any form that is illegible or incomplete may be returned to the dealer for completion and will delay the application process.
10. For any questions or if you need assistance in filling out the forms, please call Tireco Consumer Relations Department at 1-800-937-9433 or rma@tireco.com.

PLEASE NOTE:

All tires/wheels returned to Tireco for warranty consideration are subject to inspection. Tires/wheels that are found to not meet the warranty criteria [adjustable] will be disposed of at the time of inspection unless the tires/wheels have been previously requested to be returned. All tires/wheels returned to the dealer/customer will be done at the dealer's/customer's expense.

TO ASK QUESTIONS, REQUEST INFORMATION OR FILE A CLAIM:

Contact our warranty professionals at 1-800-937-9433 or via email at rma@tireco.com. No claim will be considered unless submitted in accordance with our standard claim procedures. Claim forms and all warranty related forms can be found on our website www.tireco.com. All product returns must be accompanied by a completed Return Material Authorization (RMA) form and number. Products submitted without prior authorization will not be processed and are subject to freight chargeback.

YOUR RIGHTS UNDER STATE LAW:

All implied warranties, including any warranty of merchantability or fitness for a particular purpose, are expressly limited to the duration of this Standard Limited Warranty. All obligations or liabilities for indirect, incidental or consequential damages are hereby excluded to the extent permitted by law, including economic loss, loss of profit, loss of use of vehicle, loss of time, inconvenience, personal injury or death. Some states/provinces do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusions may not apply. This Standard Limited Warranty gives the customer legal rights that may vary from state/province to state/province. This Standard Limited Warranty, the Standard Limited Mileage Warranty, the Limited Casing Warranty, the 30-Day Ride Guarantee Program, and the Road Hazard Program are the only express warranties applicable to items sold by Tireco and supersede the terms of any previous warranty.

WHAT IS COVERED:

In addition to our Standard Limited Warranty, some Milestar tires are warranted for mileage warranty from the installation date. This Standard Limited Mileage Warranty only applies to select new Passenger & Light Truck tire lines listed below:

40K MILE WARRANTY	50K MILE WARRANTY	55K MILE WARRANTY	60K MILE WARRANTY	70K MILE WARRANTY	80K MILE WARRANTY
STREETSTEEL	INTERCEPTOR AS810	PATAGONIA A/T PRO	MS932 SPORT [T, H, and V-speed ratings]	WEATHERGUARD AS710 [H, V, and W-speed ratings]	WEATHERGUARD AS710 [T-speed rating]
MS775 TOURING SLE	MS932 SPORT [W-speed rating]	PATAGONIA H/T			
PATAGONIA X/T	WEATHERGUARD AW365				
STEELPRO MS597	PATAGONIA A/T R				
STEELPRO MS597S					

LIMITED MILEAGE WARRANTY:

If within five (5) years from the date of installation, the tire wears evenly across the tread down to the tread wear indicators (2/32nds of an inch of tread remaining) before providing the minimum warranted miles of service as indicated by the vehicle odometer, a credit will be issued toward the purchase of a new tire on a pro rated basis to the actual mileage received. The mileage received will be based on the current vehicle mileage on the odometer compared to the vehicle mileage at the time of new tire installation, which must be listed on the original tire invoice and the new tire invoice.

Tires which wear out evenly before delivering the warranted mileage will be replaced on a pro-rated basis only if:

- You are the original purchaser of the tires and you still own the vehicle on which they were originally installed. The tires must have only been used on that vehicle.
- The tires have been rotated and inspected by any authorized tire dealer every 5,000 miles, and the Mounting and Rotation service record has been fully completed and signed by the dealer (the form is available at www.milestartires.com). Improper or incorrectly performed maintenance or repair that causes damage to the tires may void this warranty.
- There is no more than one puncture repair in the tread area of the tire. The puncture repair must contain a plug and innerliner patch, been properly repaired by a trained technician, and the tire does not exhibit any conditions indicating that it was operated for an extended period of time at low to no air pressure.
- The tires were originally registered online at www.milestartires.com.
- The completed service record form, Tire Installation Information Form, and the original invoices are presented to the authorized Milestar tire dealer at the time of the mileage warranty claim. These forms can be found on our website at www.milestartires.com or contact our Consumer Relations Department at 1-800-937-9433.

HOW TO FILE A CLAIM:

Each step of the following procedures must be completed in order to qualify for any credit provided by this Standard Limited Mileage Warranty:

1. The dealer/customer must contact the Tireco Consumer Relations Department to receive a Return Merchandise Number (RMA). To start the mileage warranty claim process, please contact Tireco Consumer Relations Department at 1-800-937-9433 or rma@tireco.com.
2. The dealer/customer must use the Warranty Claim Form provided by Tireco for any adjustments to be considered for credit. The Claim Form must be filled in completely (Tire size, Tread pattern, DOT, Remaining tread, etc).
3. To obtain mileage proration adjustments the dealer/customer must have completed the Tire Installation Form (found at www.milestartires.com) and provide proof of original purchase for the claim tires(s) that states the vehicle mileage at the time of the original installation.
4. Dealer/customer must obtain proof that the tires have been rotated every 5,000 miles and complete and sign Tireco's Mounting and Rotation Service Record Form (For Mileage Warranty) found at www.milestartires.com.
5. The Consumer Relations Representative will request tire(s) to be sent to one of Tireco's Adjustment Centers at our expense for inspection. Shipping instructions along with an RMA number will be provided.
6. The dealer/customer must send the completed Claim Form and all other documents for the mileage warranty with Tires to the Adjustment Center.
7. Upon receipt of documents and tires, the appropriate Tireco Representative will complete the inspection.
8. If the tire(s) is adjustable, the dealer will be notified and will be issued a credit after which the tire will be destroyed by Tireco.
9. If the tire(s) is not adjustable and does not meet the limited mileage requirements, the dealer will receive a letter of notification with an explanation. If the tire(s) was requested by the dealer to be returned, the non-adjustable tire(s) will be returned at the expense of the dealer. Any tire that the dealer leaves with Tireco will be destroyed without further notice.
10. No credit shall be given until a completed warranty claim form and all documents related to the claim are received by Tireco and the tire is found to be adjustable.
11. Any form that is illegible or incomplete may be returned to the dealer/customer for completion and will delay the application process.
12. For any questions or if you need assistance in filling out the forms, please call Tireco Consumer Relations Department 1-800-937-9433 or email us at rma@tireco.com.

DISCLAIMER:

THIS MILEAGE WARRANTY IS IN ADDITION TO THE STANDARD LIMITED WARRANTY FOR ALL MILESTAR TIRES. FOR A COMPLETE LIST OF ALL WARRANTIES, PLEASE VISIT MILESTARTIRES.COM.



30-DAY RIDE GUARANTEE PROGRAM

Milestar is offering a 30-Day Ride Guarantee on the following eligible Milestar passenger and light truck tires:

- INTERCEPTOR AS810
- WEATHERGUARD AS710 SPORT
- WEATHERGUARD AW365
- MS932 SPORT
- PATAGONIA A/T PRO
- PATAGONIA A/T R
- PATAGONIA H/T

If for any reason, you are not satisfied with your new set of Four or more eligible Milestar tires within 30 days of purchase, you may return them to the original place of purchase for a new set of tires (limited to the purchase price of the tires). Please see your participating Milestar Dealer for full details.

REQUIREMENTS AND LIMITATIONS

- 30-Day Ride Guarantee applies to 4 or more tires per vehicle (Purchase of less than 4 tires are not eligible.)
- All eligible tires must be purchased and mounted on the vehicle the same day.
- Tires must be purchased from a participating Authorized Milestar Dealer.
- If the exchange is for a more expensive tire, you agree to pay the difference (including sales tax).
- Tires must be returned undamaged. Tires exhibiting misuse, road hazard, mounting damage, vehicle mechanical-related problems, repairs, improper inflation, vandalism, run flat and/or any racing activity wear are excluded from this trial warranty.
- Replacement tire(s) must be installed on original purchase vehicle.
- This offer is available only to the original purchaser and is nontransferable.
- Original purchaser must provide valid proof of purchase within 30 days from date of replacement.
- Replacement must be done at original place of purchase.
- Taxes, mounting, balancing and service charges on the replacement tires are not included.
- Online purchases are not eligible.

DISCLAIMER

THIS 30-DAY RIDE WARRANTY IS IN ADDITION TO THE STANDARD LIMITED WARRANTY FOR ALL MILESTAR TIRES. FOR A COMPLETE LIST OF ALL WARRANTIES, PLEASE VISIT MILESTARTIRES.COM.



ROAD HAZARD PROGRAM

Milestar is offering a Road Hazard warranty on the following eligible Milestar passenger and light truck tires:

- INTERCEPTOR AS810
- WEATHERGUARD AS710 SPORT
- WEATHERGUARD AW365
- MS932 SPORT
- PATAGONIA A/T PRO
- PATAGONIA A/T R
- PATAGONIA H/T

Tire must be listed in eligible products for Road Hazard.

If the tire becomes unserviceable due to road hazard damage within the first year from the date of purchase, or within the first 2/32nds of the original usable tread, whichever comes first, the eligible Milestar tire will be replaced with an identical or comparable tire at no charge.

Tires must have been purchased through an authorized Milestar dealer and must be returned for replacement to that same dealer.

On-line sales are not eligible.

Taxes, mounting, balancing and service charges on the replacement tires are not included.

WHAT IS COVERED:

- Damage due to cuts, punctures, snags, bruises, tears, impact breaks, etc.
- Products sold in and used on vehicles registered & operated in the United States, U.S. Territories, and Canada.
- Road Hazard Warranty is only available to the original purchaser of the product, and is not transferable.

WHAT IS NOT COVERED:

Damage caused by:

- Fire
- Theft
- Vandalism
- Chemical corrosion
- Accident
- Off-road use
- Stone Drilling
- Alteration
- Improper inflation or improper installation
- Mechanical failures (e.g., failed shocks, struts, alignment, balancing, or similar failure) or interference of tire with vehicle.
- Improper mounting/dismounting practices.
- Abuse, misuse, or neglect.
- Repairable punctures (Nail or other debris punctures in the tread area), repair conforming to U.S. Tire Manufacturers Association standards, are not covered under this warranty.

DISCLAIMER

THIS ROAD HAZARD WARRANTY IS IN ADDITION TO THE STANDARD LIMITED WARRANTY FOR ALL MILESTAR TIRES. FOR A COMPLETE LIST OF ALL WARRANTIES, PLEASE VISIT MILESTARTIRES.COM.

WHEEL DIAMETER	SIZE	AS810	AS710	AW365	MS932	WINTER GUARD
19"	255/35R19	✓				
	255/40R19	✓			✓	
	255/45R19				✓	
	255/50R19				✓	
	255/55R19				✓	
	255/60R19	✓	✓			
	265/35R19	✓				
	265/50R19	✓				
	275/35R19	✓				
	275/40R19	✓				
20"	275/55R19	✓				
	305/30R19	✓				
	225/35R20	✓				
	235/35R20			✓		
	235/55R20	✓			✓	
	245/35R20	✓				
	245/40R20	✓				
	245/45R20	✓	✓			
	245/50R20	✓	✓			
	255/30R20	✓				
21"	255/35R20	✓				
	255/40R20	✓				
	255/45R20	✓				
	255/50R20	✓				
	265/35R20	✓				
	265/45R20	✓				
	265/50R20	✓				
	275/30R20	✓				
	275/35R20	✓				
	275/40R20	✓				
22"	275/45R20	✓				
	275/55R20	✓				
	285/30R20	✓				
	285/50R20	✓				
	305/30R20	✓				
	315/35R20	✓				
	245/35R21	✓				
	265/35R21	✓				
	265/40R21	✓				
	275/40R21	✓				
24"	275/45R21	✓				
	295/35R21	✓				
	235/30R22	✓				
	245/30R22	✓				
	255/30R22	✓				
	265/30R22	✓				
	265/35R22	✓				
	285/40R22	✓				
	295/25R22	✓				
	295/30R22	✓				

WHEEL DIAMETER	SIZE	AS810	AS710	AW365	MS932	WINTER GUARD
17"	225/55R17		✓	✓	✓	✓
	225/60R17		✓	✓	✓	✓
	225/65R17		✓	✓	✓	✓
	235/45R17		✓	✓	✓	✓
	235/50R17		✓	✓	✓	✓
	235/55R17		✓	✓	✓	✓
	235/60R17		✓	✓	✓	✓
	235/65R17		✓	✓	✓	✓
	245/45R17		✓	✓	✓	✓
	245/65R17		✓	✓	✓	✓
18"	265/70R17			✓		✓
	215/45R18				✓	✓
	215/55R18				✓	✓
	225/40R18	✓	✓	✓	✓	✓
	225/45R18	✓	✓	✓	✓	✓
	225/50R18	✓	✓	✓	✓	✓
	225/55R18	✓	✓	✓	✓	✓
	225/60R18	✓	✓	✓	✓	✓
	225/65R18	✓	✓	✓	✓	✓
	235/40R18	✓	✓	✓	✓	✓
19"	235/45R18	✓	✓	✓	✓	✓
	235/50R18	✓	✓	✓	✓	✓
	235/55R18	✓	✓	✓	✓	✓
	235/60R18	✓	✓	✓	✓	✓
	235/65R18	✓	✓	✓	✓	✓
	245/35R18	✓	✓	✓	✓	✓
	245/40R18	✓	✓	✓	✓	✓
	245/45R18	✓	✓	✓	✓	✓
	245/50R18	✓	✓	✓	✓	✓
	245/55R18	✓	✓	✓	✓	✓

WHEEL DIAMETER	SIZE	AS810	AS710	AW365	MS932	STREET STEEL	MS775	WINTER GUARD
13"	155/80R13				✓		✓	
	175/80R13				✓		✓	
	175/65R14				✓			✓
	175/70R14				✓			✓
	185/65R14				✓			✓
14"	185/70R14							
	185/75R14				✓		✓	
	195/75R14				✓		✓	
	205/75R14				✓		✓	
	215/70R14							
	225/70R14							✓
	175/65R15							✓
	185/55R15							✓
	185/60R15			✓				✓
	185/65R15			✓				✓
15"	195/60R15			✓				✓
	195/65R15			✓				✓
	205/65R15			✓				✓
	205/70R15						✓	
	205/75R15						✓	
	215/60R15							
	215/65R15							
	215/70R15							✓
	215/75R15							
	225/70R15							
16"	225/75R15							
	235/60R15							
	235/70R15							
	235/75R15							
	245/60R15							
	255/70R15							
	275/60R15							
	295/50R15							
	205/55R16							✓
	205/60R16							✓
17"	205/65R16							✓
	215/55R16							✓
	215/60R16							✓
	215/65R16							✓
	215/70R16							✓
	225/60R16							✓
	225/65R16							✓
	235/60R16							✓
	235/65R16							✓
	235/70R16							✓

PATAGONIA SIZE MATRIX • SUV / LIGHT TRUCK

WHEEL DIAMETER	SIZE	M/T-02	X/T	A/T PRO	A/T R	H/T	WHEEL DIAMETER	SIZE	M/T-02	X/T	A/T PRO	A/T R	H/T	WHEEL DIAMETER	SIZE	M/T-02	X/T	A/T PRO	A/T R	H/T			
15"	215/75R15			✓			17"	33X12.50R17LT	✓	✓				20"	265/50R20			✓					
	225/75R15		✓					35X12.50R17LT		✓		✓				LT265/60R20			✓				✓
	235/75R15		✓	✓				37X12.50R17LT	✓	✓						LT275/55R20			✓				✓
	30X9.50R15LT		✓	✓				38X13.50R17LT	✓							LT275/60R20			✓				✓
	31X10.50R15LT	✓		✓				40X13.50R17LT	✓	✓						LT275/65R20			✓				✓
	33X12.50R15LT	✓		✓				42X14.50R17LT	✓							LT285/55R20			✓				✓
	35X12.50R15LT	✓		✓				LT235/80R17								LT285/60R20			✓				✓
	LT235/75R15				✓			LT245/70R17		✓						LT285/65R20			✓				✓
	215/70R16				✓			LT245/75R17								LT295/55R20			✓				✓
	225/70R16				✓			LT255/80R17		✓						LT295/60R20			✓				✓
16"	235/70R16				✓		LT265/70R17		✓					LT295/65R20			✓				✓		
	245/70R16				✓		LT275/70R17		✓					LT295/65R20			✓				✓		
	245/75R16			✓			LT275/80R17		✓					275/50R22							✓		
	255/70R16			✓			LT285/70R17		✓					285/45R22							✓		
	265/70R16			✓			LT285/75R17							33X12.50R22LT			✓				✓		
	265/75R16			✓			LT295/70R17		✓					35X12.50R22LT			✓				✓		
	LT215/85R16				✓		LT315/70R17		✓					37X13.50R22LT			✓				✓		
	LT225/75R16				✓		255/55R18							40X15.50R22LT			✓				✓		
	LT235/85R16				✓		255/65R18																
	LT245/75R16				✓		255/70R18																
17"	LT265/75R16				✓		265/60R18																
	LT285/75R16				✓		265/65R18																
	LT305/70R16				✓		265/70R18																
	LT315/75R16				✓		275/65R18																
	225/65R17				✓		33X12.50R18LT	✓															
	235/65R17				✓		35X12.50R18LT	✓	✓														
	235/75R17				✓		LT265/70R18		✓														
	245/65R17				✓		LT275/65R18		✓														
	245/70R17				✓		LT275/70R18		✓														
	255/65R17				✓		LT285/65R18																



@milestartires



@milestar.tires



milestartires.com

ONLINE SERVICES
www.tireco.com
customerservice@tireco.com

CUSTOMER SERVICE
TOLL FREE
800.227.8925

TELEPHONE
310.767.7990

500 W 190TH ST, SUITE 600, GARDENA, CA 90248

